

PCA-M R32 Ceiling Suspended System

Power Inverter Heat Pump (Single Phase)



The **PCA-M Power Inverter** range is a ceiling suspended system that blends a host of outstanding features with a sophisticated streamlined design. Offering high seasonal efficiency, advanced control options and extended pipe runs, this range is an extremely flexible solution for commercial applications.

Key Features & Benefits

- Increased comfort levels through advanced airflow and smart defrost features
- 100m pipe run (size 100-140), increasing application capability
- Energy monitoring & 14°C set point option as standard; ideal for applications where a specialist ambient condition is required (requires PAR-41MAA controller)
- High / Low ceiling height modes
- Flush to wall installation for concealment of service connections
- Full heating capacity down to -3°C
- 'Backup and rotate' feature to reduce load on individual units and prolong product life (requires PAR-41MAA controller)



PCA-M - INDOOR UNITS		PCA-M50KA2	PCA-M60KA2	PCA-M71KA2	PCA-M100KA2	PCA-M125KA2	PCA-M140KA2
CAPACITY (kW)	Heating (nominal)	5.5 (2.5-6.6)	7.0 (2.8-8.2)	8.0 (3.5-10.2)	11.2 (4.5-14.0)	14.0 (5.0-16.0)	16.0 (5.7-18.0)
	Cooling (nominal)	5.0 (2.3-5.6)	6.1 (2.7-6.7)	7.1 (3.3-8.1)	9.5 (4.9-11.4)	12.5 (5.5-14.0)	13.4 (6.2-15.0)
	Heating (UK)	4.7 (2.15-5.6)	5.95 (2.4-6.95)	6.8 (3.0-8.65)	9.5 (3.85-11.9)	11.9 (4.25-13.6)	13.6 (4.85-15.3)
	Cooling (UK)	4.6 (2.1-5.15)	5.5 (2.5-6.15)	6.55 (3.05-7.45)	9.2 (4.5-10.5)	11.5 (5.05-12.9)	12.9 (5.7-13.8)
SHF (nominal)		0.79	0.81	0.76	0.77	0.72	0.72
COP / EER (nominal)		4.04 / 4.00	4.01 / 4.01	3.71 / 3.88	3.71 / 4.10	3.54 / 3.25	3.61 / 3.40
SCOP (ηsh) / SEER (ηsc) (BS EN14825)		4.2 / 6.7	4.1 / 6.5	4.2 / 6.7	4.3 / 6.4	4.3 (168.8%) / 6.2 (251.0%)	4.4 (173.5%) / 6.2 (248.9%)
ERP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A++	A+ / A++	A+ / A++	A+ / A++	-	-
AIRFLOW (l/s)	Lo-Mi1-Mi2-Hi	167-183-217-250	250-267-283-317	267-283-300-333	367-400-433-467	383-417-450-483	400-433-483-533
PIPE SIZE MM (in)	Gas/Liquid	12.7 (1/2") / 6.35 (1/4")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Mi1-Mi2-Hi	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	39-41-43-45	41-43-45-48
SOUND POWER LEVEL (dBA)		60	60	62	63	65	68
DIMENSIONS (mm)	Width x Depth x Height	960 x 680 x 230	1280 x 680 x 230	1280 x 680 x 230	1600 x 680 x 230	1600 x 680 x 230	1600 x 680 x 230
WEIGHT (kg)		26	32	32	37	38	40
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6
INTERCONNECTING CABLE	No. Cores	4	4	4	4	4	4
WIRED REMOTE CONTROLLER REFERENCE		PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA
WIRELESS REMOTE CONTROLLER REFERENCE		PAR-SL94B	PAR-SL94B	PAR-SL94B	PAR-SL94B	PAR-SL94B	PAR-SL94B

PUZ-ZM - OUTDOOR UNITS		PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM140VKA2
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	46 / 44	49 / 47	49 / 47	51 / 49	52 / 50	52 / 50
SOUND POWER LEVEL (dBA)	Cooling	65	67	67	69	70	70
WEIGHT (kg)		46	67	67	105	105	105
DIMENSIONS (mm)	Width x Depth x Height	809 x 300 x 630	950 x 330 + 25 x 943	950 x 330 + 25 x 943	1050 x 330 + 40 x 1338	1050 x 330 + 40 x 1338	1050 x 330 + 40 x 1338
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	1.361 / 1.25	1.745 / 1.521	2.156 / 1.829	3.018 / 2.317	3.954 / 3.846	4.432 / 3.941
	Heating/Cooling (UK)	1.21 / 1.06	1.55 / 1.29	1.92 / 1.55	2.41 / 1.99	3.51 / 3.26	3.94 / 3.35
STARTING CURRENT (A)		4.3	5.3	5.3	10.7	13.2	13.2
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	5.95 / 5.37 [13.4]	7.43 / 6.48 [19.4]	9.23 / 7.81 [19.4]	12.97 / 9.97 [27.2]	16.87 / 16.46 [27.3]	18.76 / 16.66 [28.9]
FUSE RATING (BS88) - HRC (A)		16	25	25	32	32	40
MAINS CABLE NO. CORES		3	3	3	3	3	3
MAX PIPE LENGTH (m)		50	55	55	100	100	100
MAX HEIGHT DIFFERENCE (m)		30	30	30	30	30	30
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675)	2.00 / 1.35 (30m)	2.80 / 1.89 (30m)	2.80 / 1.89 (30m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675)	0.30 / 0.20	0.80 / 0.54	0.80 / 0.54	2.40 / 1.62	2.40 / 1.62	2.40 / 1.62

Accessories

Indoor Units

PAR-SL94B

Wireless remote controller and adaptor for PCA-M50-140KA2

Outdoor Units

PAC-SJ07SG

Air outlet guide for PUZ-ZM50VKA2

PAC-SG59SG

Air outlet guide for PUZ-ZM60-71VHA2

PAC-SH96SG

Air outlet guide for PUZ-ZM100-140VKA2

PAC-SJ71FM-E

30Pa outdoor fan motor for PUZ-ZM100-140VKA2

System Control Units

PAC-SA89TA

Remote on/off adaptor (3 wire adaptor)

PAC-SA88HA

Run/fault adaptor (5 wire adaptor)

PAC-SE41TS-E

Remote sensor

PAR-CT01MAA-SB/PB

Touch screen wired remote controller (PB=Premium Finish)

PAR-41MAA

Standard wired remote controller

MAC-587IF-E

Interface for connection to Wi-Fi MELCloud service

MELCOBEMS MINI (A1M+)

Modbus and BACnet MSTP CN105 adaptor

MELCORETAIL MINI

Retail control and input / output interface

PAC-SK15MA-E

M-NET adaptor for size 50


PAC-SJ95MA

M-NET adaptor for size 60 to 140

Product Dimensions

PCA-M50KA2


Lower View



Front View




Side View




Product Dimensions

PCA-M60/71KA2


Lower View

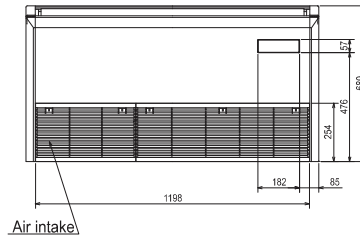

Front View

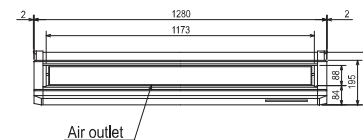


Side View




Product Dimensions

PCA-M100/125/140KA2


Lower View

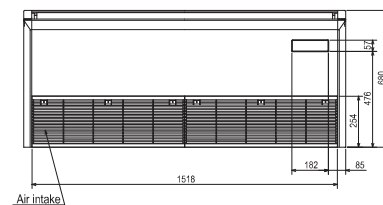

Front View

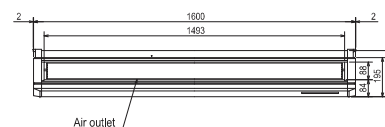

Side View



Note: Please see page 1.3.66 for the full range of accessories.