


PFFY-P-VLEM-E

Floor Standing Exposed Indoor Unit

The **PFFY-P-VLEM-E** is a compact cased unit that provides simple, effective air conditioning in perimeter zones. Constructed in a robust, metal casement, and with a depth of only 220mm, it offers a flexible solution for applications such as offices, retail and hospitals.


Key Features & Benefits

- Perimeter air conditioning for retrofit applications where ceiling void not available
- Minimalist design with exposed casement
- Convenient built-in housing for the remote controller

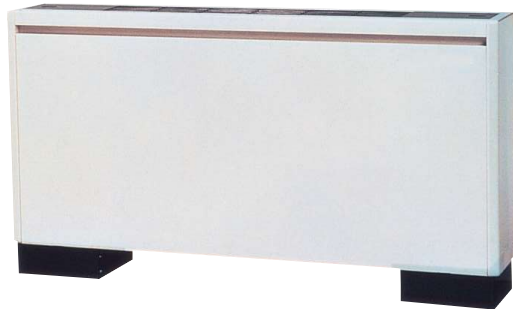


INDOOR UNITS		PFFY-P20VLEM-E	PFFY-P25VLEM-E	PFFY-P32VLEM-E	PFFY-P40VLEM-E	PFFY-P50VLEM-E	PFFY-P63VLEM-E
CAPACITY (kW)	Heating (nominal)	2,5	3,2	4,0	5,0	6,3	8,0
	Cooling (nominal)	2,2	2,8	3,6	4,5	5,6	7,1
	UK Heating	2,5	3,2	4,0	5,0	6,3	8,0
	UK Total Cooling - Hi (Sensible)	2,00 (1,60)	2,50 (1,90)	3,20 (2,40)	4,10 (3,00)	5,00 (3,80)	6,40 (4,70)
	UK Total Cooling - Lo	1,92	2,40	2,97	3,88	4,81	5,93
POWER INPUT (kW)	Heating (nominal)	0,04	0,04	0,06	0,065	0,085	0,10
	Cooling (nominal)	0,04	0,04	0,06	0,065	0,085	0,10
AIRFLOW (l/s)	Lo-Hi	92-108	92-108	117-150	150-183	200-233	200-258
SOUND PRESSURE LEVEL (dBA)	Lo-Hi	34-40	34-40	35-40	38-43	38-43	40-46
WEIGHT (kg)		23	23	25	26	30	32
DIMENSIONS (mm)	Width	1050	1050	1170	1170	1410	1410
	Depth	220	220	220	220	220	220
	Height	630	630	630	630	630	630
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single
RUNNING CURRENT (A)	Heating / Cooling	0.19 / 0.19	0.19 / 0.19	0.29 / 0.29	0.32 / 0.32	0.40 / 0.40	0.46 / 0.46
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6
MAINS CABLE No. Cores		3	3	3	3	3	3

Upper View

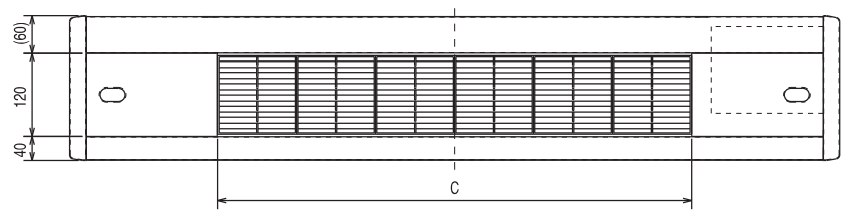

Front View

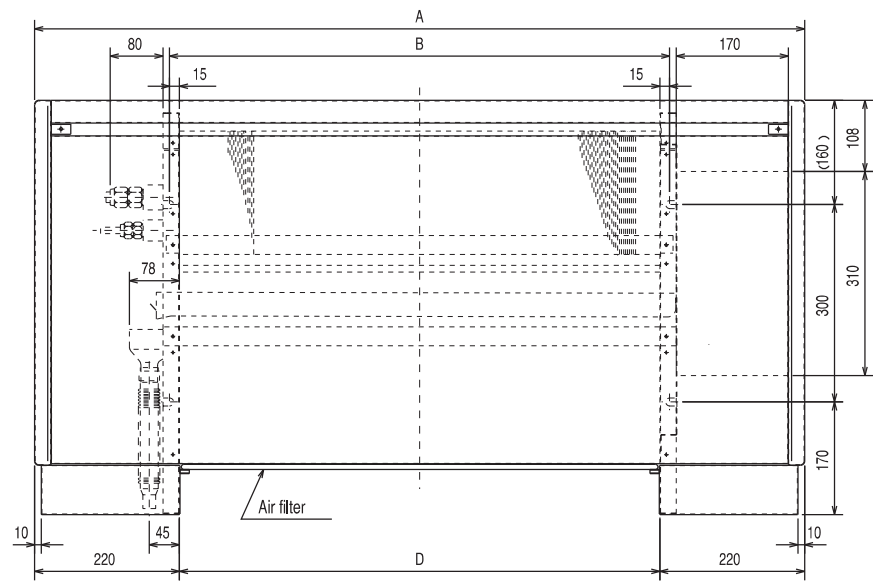

Model	A	B	C	D
PFFY-P20VLEM-E	1050	640	600	610
PFFY-P25VLEM-E	1050	640	600	610
PFFY-P32VLEM-E	1170	760	720	730
PFFY-P40VLEM-E	1170	760	720	730
PFFY-P50VLEM-E	1410	1000	960	970
PFFY-P63VLEM-E	1410	1000	960	970