

PCFY-P-VKM-E

Ceiling Suspended Indoor Unit

Designed for ultra-quiet operation and easy maintenance, the **PCFY-P-VKM-E** provides comfortable air conditioning for a wide range of applications where floor or wall space cannot be used practically.

Key Features & Benefits


- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Drain piping can be connected from left or right



INDOOR UNITS		PCFY-P40VKM-E	PCFY-P63VKM-E	PCFY-P100VKM-E	PCFY-P125VKM-E
CAPACITY (kW)	Heating (nominal)	5.0	8.0	12.5	16.0
	Cooling (nominal)	4.5	7.1	11.2	14.0
	UK Heating	5.0	8.0	12.5	16.0
	UK Total Cooling - Hi (Sensible)	4.10 (3.00)	6.40 (4.60)	10.10 (7.10)	12.60 (8.90)
	UK Total Cooling - M2	4.03	6.22	9.94	12.17
POWER INPUT (kW)	UK Total Cooling - M1	3.92	6.09	9.70	11.66
	UK Total Cooling - Lo	3.79	5.93	9.23	11.00
	Heating (nominal)	0.04	0.05	0.09	0.11
AIRFLOW (l/s)	Cooling (nominal)	0.04	0.05	0.09	0.11
	Lo-Mi1-Mi2-Hi	167-183-200-217	233-250-267-300	350-400-433-467	350-400-450-517
SOUND PRESSURE LEVEL (dBA) Lo-Mi1-Mi2-Hi		29-32-34-36	31-33-35-37	36-38-41-43	36-39-42-44
WEIGHT (kg)		24	32	36	38
DIMENSIONS (mm)	Width	960	1280	1600	1600
	Depth	680	680	680	680
	Height	230	230	230	230
	ELECTRICAL SUPPLY	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.28 / 0.28	0.33 / 0.33	0.65 / 0.65	0.76 / 0.76
FUSE RATING (BS88) - HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3


Product Dimensions

PCFY-P40VKM-E

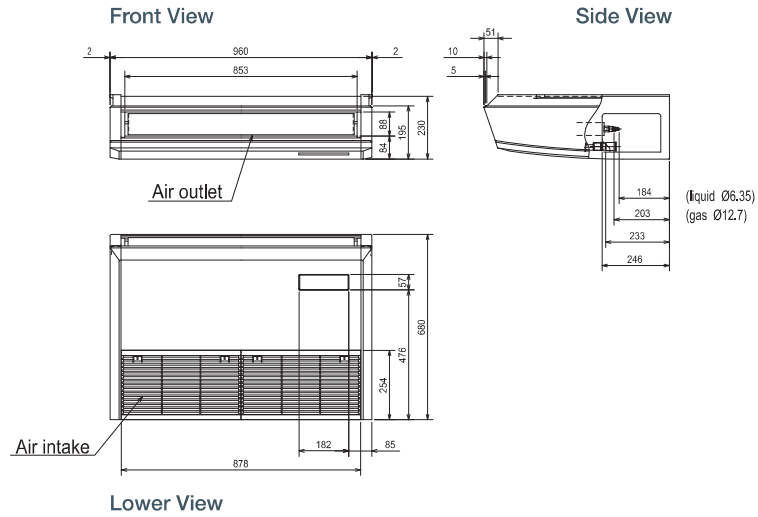

Product Dimensions

PCFY-P63VKM-E

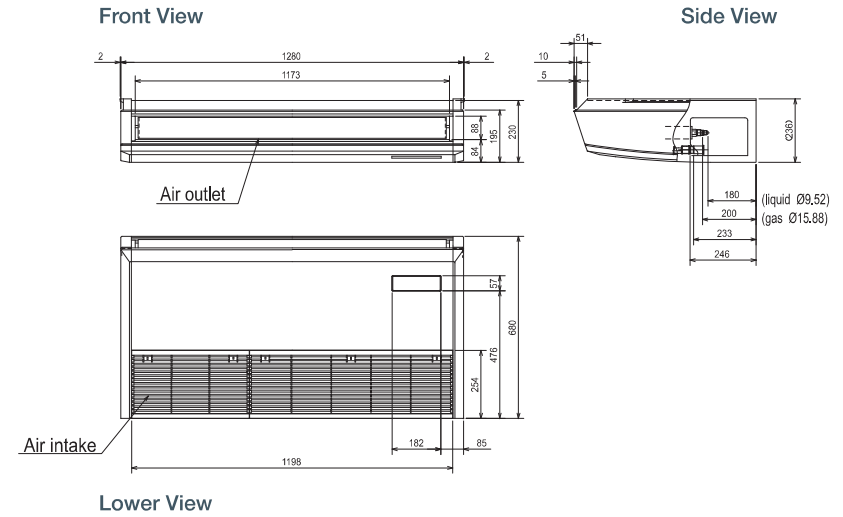

Product Dimensions

PCFY-P100/125VKM-E

