

PCFY-WL-VKM-E

Ceiling Suspended Indoor Unit

Designed for ultra-quiet operation and easy maintenance, the **PCFY-WL-VKM-E** provides comfortable air conditioning for a wide range of applications where floor or wall space cannot be used practically.

Key Features & Benefits

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Drain piping can be connected from left or right




INDOOR UNITS		PCFY-WL40VKM-E	PCFY-WL63VKM-E	PCFY-WL80VKM-E
CAPACITY (kW)	Heating (nominal)	5.0	8.0	10.0
	Cooling (nominal)	4.5	7.1	9.0
	UK Heating	5.0	8.0	10.0
	UK Total Cooling - Hi (Sensible)	4.00 (3.00)	6.40 (4.80)	8.10 (6.10)
	UK Total Cooling - M2	3.93	6.22	7.97
	UK Total Cooling - M1	3.82	3.09	7.78
POWER INPUT (kW)	UK Total Cooling - Lo	3.69	5.93	7.40
	Heating (nominal)	0.04	0.06	0.08
	Cooling (nominal)	0.04	0.06	0.08
AIRFLOW (l/s)	Lo-M1-M2-Hi	167-183-200-217	233-250-267-300	350-400-433-467
SOUND PRESSURE LEVEL (dBA)	Lo-M1-M2-Hi	32-35-37-39	34-37-40-43	39-40-42-44
WEIGHT (kg)		25	32	39
DIMENSIONS (mm)	Width	960	1280	1600
	Depth	680	680	680
	Height	230	230	230
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.34 / 0.34	0.52 / 0.52	0.69 / 0.69
FUSE RATING (BS88) - HRC (A)		6	6	6
MAINS CABLE No. Cores		3	3	3
WATER PIPE CONNECTION		20mm I.D	30mm I.D	30mm I.D

Note: HVRF indoor units can only be configured with the CMB-WM HBC (HVRF) and PURY-(E)M YNW-A1 or PQRY-P YLM-A1 outdoor units.


Product Dimensions

PCFY-WL40VKM-E

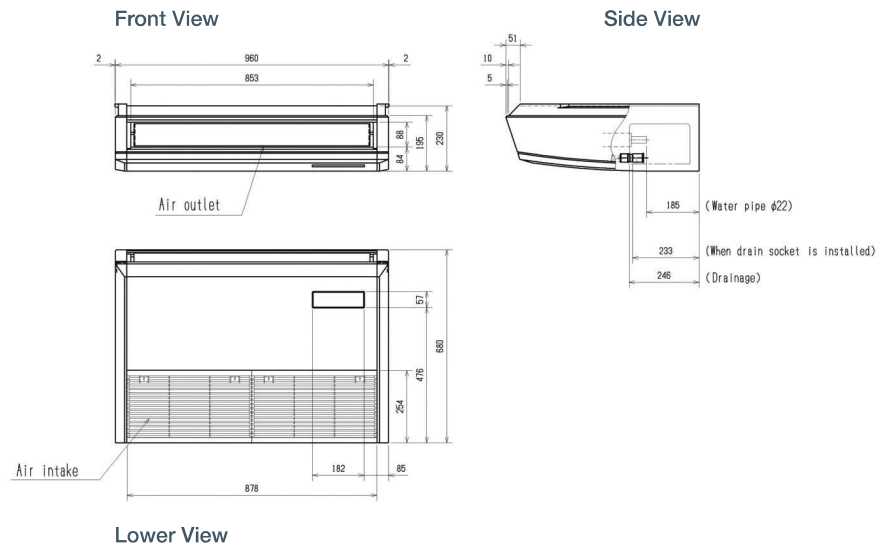

Product Dimensions

PCFY-WL63VKM-E

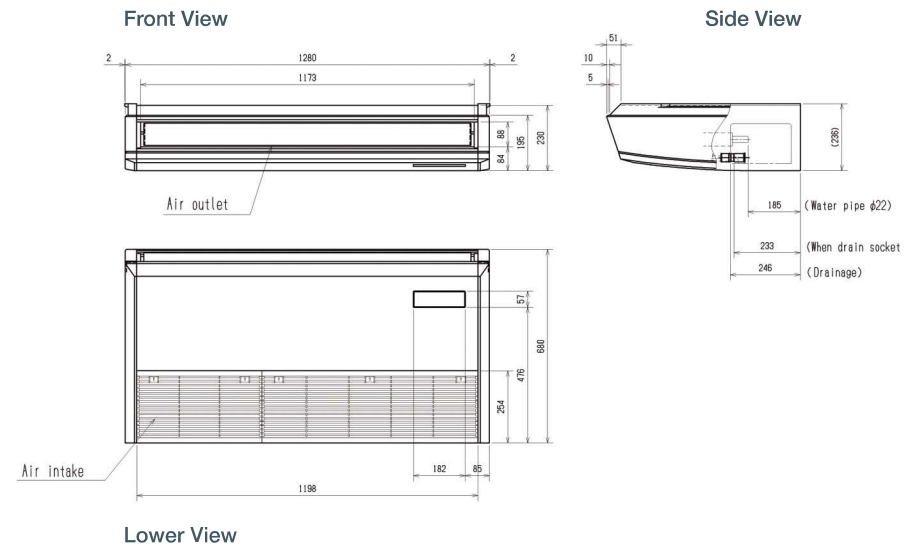

Product Dimensions

PCFY-WL80VKM-E

