

PFFY-P-VKM-E

Floor Standing Exposed Indoor Unit

The **PFFY-P-VKM-E** is extremely versatile and designed for wall attached installation at floor level. The auto swing vane provides a more natural and comfortable airflow throughout the room and the lightweight, compact design makes installation easy.

Key Features & Benefits


- White, slimline design for easy installation
- Upper and lower vanes for optimum, powerful and efficient air distribution

R410A




INDOOR UNITS		PFFY-P20VKM-E	PFFY-P25VKM-E	PFFY-P32VKM-E	PFFY-P40VKM-E
CAPACITY (kW)	Heating (nominal)	2.5	3.2	4.0	5.0
	Cooling (nominal)	2.2	2.8	3.6	4.5
	UK Heating	2.5	3.2	4.0	5.0
	UK Total Cooling - Hi (Sensible)	2.00 (1.60)	2.50 (1.90)	3.20 (2.30)	4.10 (2.90)
	UK Total Cooling - M12	1.94	2.42	3.10	3.98
POWER INPUT (kW)	UK Total Cooling - M11	1.86	2.31	2.96	3.92
	UK Total Cooling - Lo	1.75	2.17	2.78	3.74
	Heating (nominal)	0.025	0.025	0.025	0.028
	Cooling (nominal)	0.025	0.025	0.025	0.028
	AIRFLOW (l/s) Lo-M11-M12-Hi	98-113-127-145	102-117-133-152	102-117-133-152	133-150-158-178
SOUND PRESSURE LEVEL (dBA) Lo-M11-M12-Hi		27-31-34-37	28-32-35-38	28-32-35-38	35-38-42-44
WEIGHT (kg)		15	15	15	15
DIMENSIONS (mm)	Width	700	700	700	700
	Depth	200	200	200	200
	Height	600	600	600	600
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.20 / 0.20	0.20 / 0.20	0.20 / 0.20	0.24 / 0.24
FUSE RATING (BS88) - HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3

Upper View

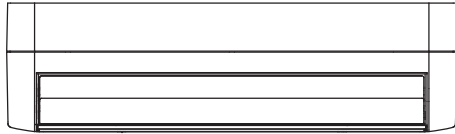

Front View

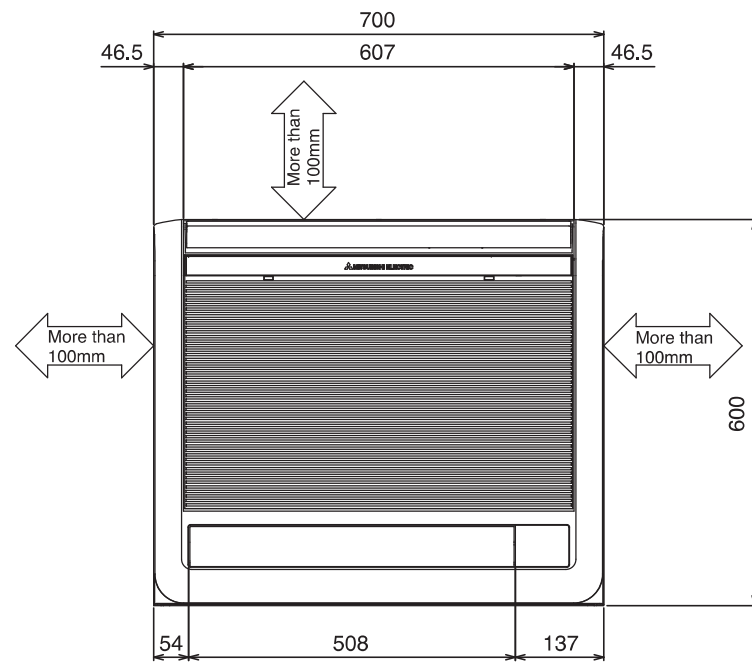

Side View

