

PKFY-P-VLM-E / VKM-E

Wall Mounted Indoor Unit

The elegant, compact design of the **PKFY-P** wall mounted indoor unit, is an ideal unit choice for exposed applications. The units quiet operation promotes minimal disturbance in close proximity.

Key Features & Benefits

- Compact flat panel design - only 773mm wide (sizes 10-32)
- Widened vane control for improved air distribution and comfort
- Reduced noise levels of 22dB(A) (sizes 10-25) enabling minimal disturbance
- Compatible with Plasma Quad Connect - an innovative, bolt-on air purifying device which neutralises viruses, bacteria, allergens, PM2.5, mould and dust. For more information, please refer to page 1.1.7

R410A




INDOOR UNITS		PKFY-P10VLM-E	PKFY-P15VLM-E	PKFY-P20VLM-E	PKFY-P25VLM-E	PKFY-P32VLM-E	PKFY-P40VLM-E	PKFY-P50VLM-E	PKFY-P63VKM-E
CAPACITY (kW)	Heating (nominal)	1.4	1.9	2.5	3.2	4.0	5.0	6.3	8.0
	Cooling (nominal)	1.2	1.7	2.2	2.8	3.6	4.5	5.6	7.1
	UK Heating	1.4	1.9	2.5	3.2	4.0	5.0	6.3	8.0
	UK Total Cooling - Hi (Sensible)	1.10 (1.00)	1.50 (1.10)	2.00 (1.40)	2.50 (1.80)	3.20 (2.50)	4.10 (3.10)	5.00 (3.60)	6.40 (5.00)
	UK Total Cooling - M12	1.08	1.50	1.98	2.47	3.16	4.04	4.89	-
POWER INPUT (kW)	UK Total Cooling - M11	1.07	1.48	1.94	2.43	3.13	4.01	4.84	-
	UK Total Cooling - Lo	1.03	1.48	1.91	2.38	3.03	3.81	4.57	6.01
	Heating (nominal)	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.04
	Cooling (nominal)	0.02	0.02	0.02	0.03	0.04	0.04	0.05	0.05
	AIRFLOW (l/s) Lo-M11-M12-Hi	55-58-63-70	67-70-73-78	67-73-82-90	67-77-90-112	72-90-115-140	105-123-143-167	113-138-170-207	267-333
SOUND PRESSURE LEVEL (dBA) Lo-M11-M12-Hi		22-24-26-28	22-24-26-28	22-26-29-31	22-27-31-35	24-31-37-41	29-34-37-40	31-36-41-46	39-45
WEIGHT (kg)		11	11	11	11	11	13	13	21
DIMENSIONS (mm)	Width	773	773	773	773	773	898	898	1170
	Depth	237	237	237	237	237	237	237	295
	Height	299	299	299	299	299	299	299	365
ELECTRICAL SUPPLY		220-240v, 50hz	220-240v, 50hz	220-240v, 50hz	220-240v, 50hz	220-240v, 50hz	220-240v, 50hz	220-240v, 50hz	220-240v, 50hz
PHASE		Single	Single	Single	Single	Single	Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.15 / 0.20	0.15 / 0.20	0.15 / 0.20	0.20 / 0.25	0.30 / 0.35	0.30 / 0.35	0.40 / 0.45	0.30 / 0.37
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6	6
MAINS CABLE No. Cores		3	3	3	3	3	3	3	3


Product Dimensions

PKFY-P10/15/20/25/32VLM-E

Front View

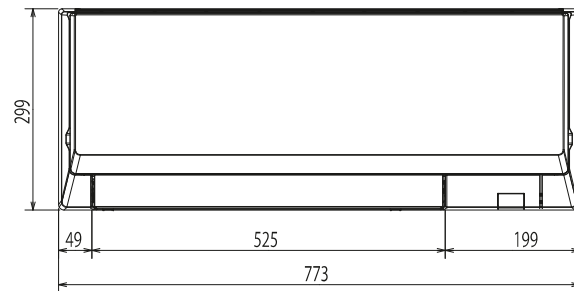


Side View




Product Dimensions

PKFY-P40/50VLM-E

Front View

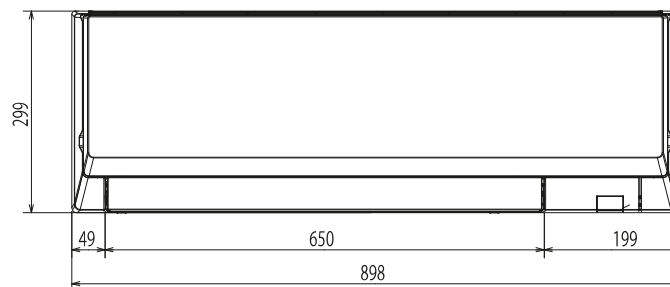


Side View



Product Dimensions

PKFY-P63VKM-E

Front View

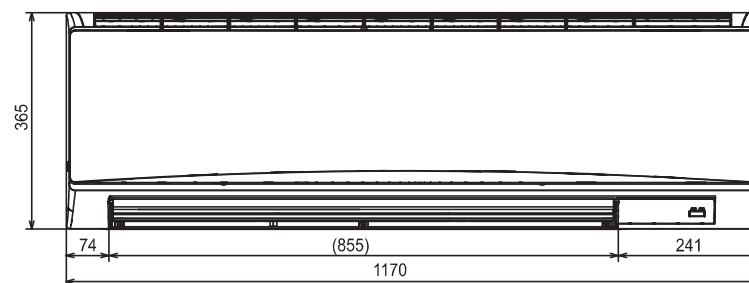

Side View

