

PSA-M R32 Floor Standing System

Power Inverter Heat Pump

The **PSA-M Power Inverter** range is a floor standing system that blends a host of outstanding features with a sophisticated streamlined design. Offering high seasonal efficiency, advanced control options and quiet operation, this range allows installation where limited ceiling space is available.

Key Features & Benefits

- Built in PAR-41MAA controller allows effective energy consumption monitoring
- Increased comfort levels through advanced airflow and smart defrost features
- 100m pipe run (size 100-140), increasing application capability
- 14°C set point option; ideal for applications where a specialist ambient condition is required
- Quick and easy installation, saving on time and cost
- Compact body and minimal footprint - ideal for applications where space-saving is a requirement

R32

PSA-M - INDOOR UNITS		PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
CAPACITY (kW)	Heating (nominal)	7.6 (3.5-10.2)	11.2 (2.7-14.0)	11.2 (2.7-14.0)	14.0 (3.2-16.0)	14.0 (3.2-16.0)	16.0 (3.7-18.0)	16.0 (3.7-18.0)
	Cooling (nominal)	7.1 (3.3-8.1)	9.5 (4.9-11.4)	9.5 (4.9-11.4)	12.5 (5.1-14.0)	12.5 (5.1-14.0)	13.4 (5.4-15.0)	13.4 (5.4-15.0)
	Heating (UK)	6.45 (3.0-8.65)	8.06 (1.94-10.08)	8.06 (1.94-10.08)	10.08 (2.30-11.52)	10.08 (2.30-11.52)	11.52 (2.66-12.96)	11.52 (2.66-12.96)
	Cooling (UK)	6.55 (3.05-7.45)	8.74 (4.51-10.49)	8.74 (4.51-10.49)	11.50 (4.69-12.88)	11.50 (4.69-12.88)	12.33 (4.97-13.80)	12.33 (4.97-13.80)
SHF (nominal)		0.79	0.73	0.73	0.72	0.72	0.71	0.71
COP / EER (nominal)		3.25 / 3.76	3.40 / 3.81	3.40 / 3.81	2.90 / 3.00	2.90 / 3.00	3.00 / 3.37	3.00 / 3.37
SCOP (ηsh) / SEER (ηsc) (BS EN14825)		4.00 (157.8%) / 6.40 (266.2%)	4.10 / 5.70	4.10 / 5.60	3.93 (154.3%) / 5.40 (213.0%)	3.93 (154.2%) / 5.37 (211.9%)	4.06 (159.3%) / 6.34 (250.6%)	4.06 (159.3%) / 6.33 (250.0%)
ErP ENERGY EFFICIENCY CLASS Heating/Cooling		A+ / A++	A+ / A+	A+ / A+	-	-	-	-
AIRFLOW (l/s) Lo-Mi-Hi		333-367-400	417-467-500	417-467-500	417-467-517	417-467-517	417-467-517	417-467-517
PIPE SIZE mm (in) Gas/Liquid		15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA) Lo-Mi-Hi		40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
SOUND POWER LEVEL (dBA)		60	65	65	66	66	66	66
DIMENSIONS (mm) Width x Depth x Height		600 x 360 x 1900	600 x 360 x 1900	600 x 360 x 1900	600 x 360 x 1900	600 x 360 x 1900	600 x 360 x 1900	600 x 360 x 1900
WEIGHT (kg) Unit / Panel		46	46	46	46	46	48	48
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6
INTERCONNECTING CABLE No. Cores		4	4	4	4	4	4	4
WIRED REMOTE CONTROLLER REFERENCE		PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA

PUZ-ZM - OUTDOOR UNITS		PUZ-ZM71VHA2	PUZ-ZM100VDA	PUZ-ZM100YDA ^③	PUZ-ZM125VDA	PUZ-ZM125YDA ^③	PUZ-ZM140VDA	PUZ-ZM140YDA ^③
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		49 / 47	48 / 44	48 / 44	50 / 47	50 / 47	51 / 49	51 / 49
SOUND POWER LEVEL (dBA) Cooling		67	63	63	66	66	68	68
WEIGHT (kg)		67	107	114	107	116	107	121
DIMENSIONS (mm) Width x Depth x Height		950 x 330 x 25 x 943	1100 x 460 x 45 x 870	1100 x 460 x 45 x 870	1100 x 460 x 45 x 870	1100 x 460 x 45 x 870	1100 x 460 x 45 x 870	1100 x 460 x 45 x 870
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	380-415v, 50Hz	220-240v, 50Hz	380-415v, 50Hz	220-240v, 50Hz	380-415v, 50Hz
PHASE		Single	Single	Three	Single	Three	Single	Three
SYSTEM POWER	Heating/Cooling (nominal)	2.338 / 1.888	3.295 / 2.494	3.295 / 2.494	4.828 / 4.167	4.828 / 4.167	5.334 / 3.977	5.334 / 3.977
	Heating/Cooling (UK)	2.08 / 1.60	2.70 / 2.12	2.70 / 2.12	3.96 / 3.54	3.96 / 3.54	4.37 / 3.38	4.37 / 3.38
STARTING CURRENT (A)		5.3	11.9	3.5	11.9	3.5	11.9	3.5
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]		9.05 / 6.96 [19.4]	15.24 / 11.54 [27.2]	5.06 / 3.83 [8.7]	22.33 / 19.27 [27.2]	7.41 / 6.40 [9.7]	24.67 / 18.40 [30.7]	8.19 / 6.11 [9.7]
FUSE RATING (BS88) - HRC (A)		25	32	16	32	16	40	16
MAINS CABLE No. Cores		3	3	5	3	5	3	3
MAX PIPE LENGTH (m)		55	100	100	100	100	100	100
MAX HEIGHT DIFFERENCE (m)		30	30	30	30	30	30	30
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) R32 (GWP 675)		2.80 / 1.89 (30m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) R32 (GWP 675)		0.80 / 0.54	2.40 / 1.62	2.40 / 1.62	2.40 / 1.62	2.40 / 1.62	2.40 / 1.62	2.40 / 1.62

③ Three Phase Note: Includes built in PAR-41MAA wired remote controller.



Accessories

Outdoor Units

PAC-SG59SG

Air outlet guide for PUZ-ZM71VHA2

PAC-SL12SG-E

Air outlet guide for PUZ-ZM100-140VDA/YDA

System Control Units

PAC-SA89TA

Remote on/off adaptor (3 wire adaptor)

PAC-SA88HA

Run/fault adaptor (5 wire adaptor)

PAC-SE41TS-E

Remote sensor

MAC-587IF-E

Interface for connection to Wi-Fi MELCloud service

MELCOBEMS MINI (A1M+)

Modbus and BACnet MSTP CN105 adaptor

MELCORETAIL MINI

Retail control and input / output interface

PAC-SJ95MA


M-NET adaptor for size 71

PAC-SL16MA-E

M-NET Adaptor for size 100 to 140

Product Dimensions

PSA-M71/100/125/140KA

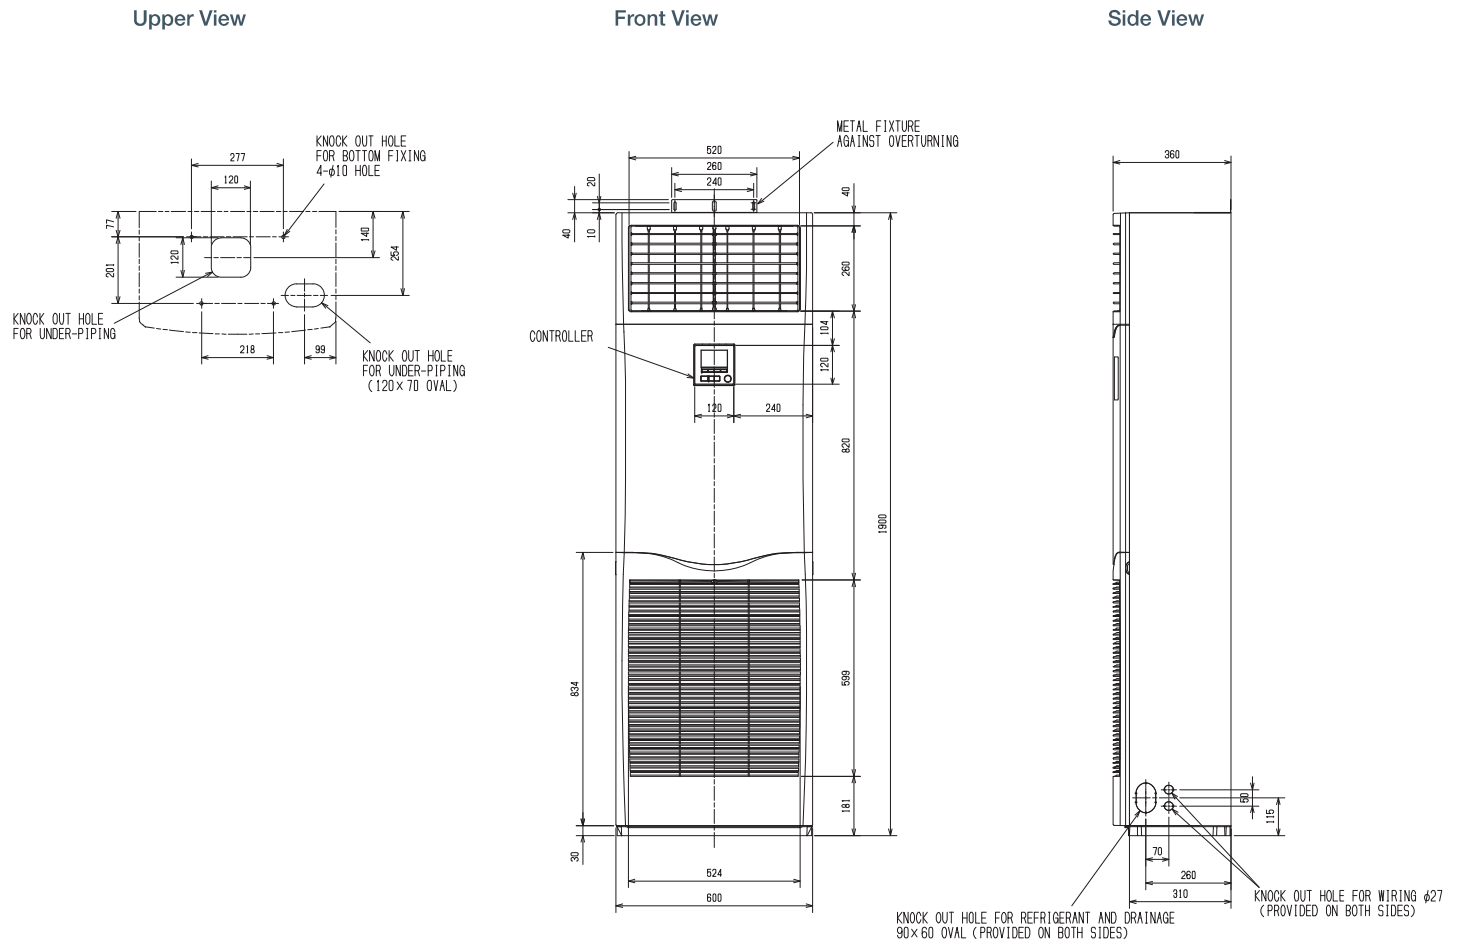

Note: Please see page 1.3.66 for the full range of accessories.