


camper trailer series

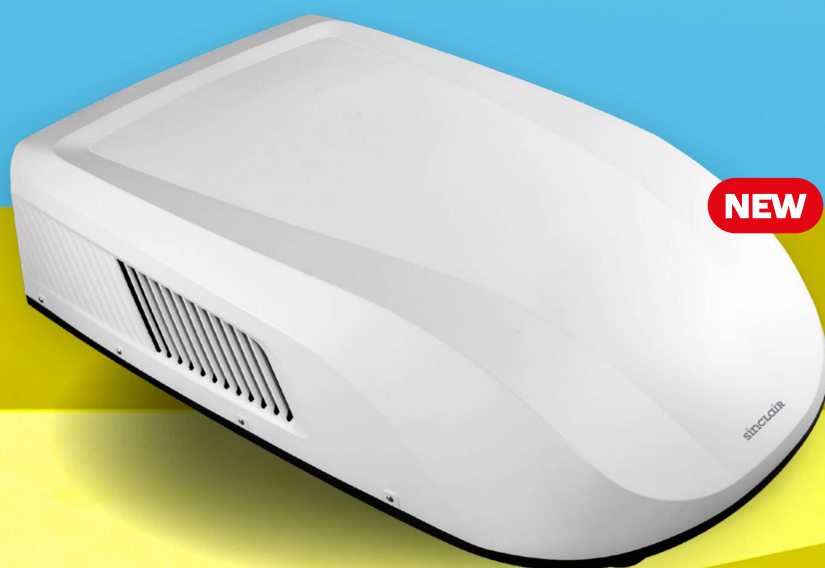


FEATURES

- Operating temperature -5~46 °C
- For roofs with a thickness of 30-80 mm
- Power supply 220-240V/50Hz/1Ph
- Stepless inverter regulation
- WiFi
- Ultraslim design of indoor panel
- Compressor protection
- Manual and remote control
- Powerful cooling, heating and dehumidification
- Quiet operation
- Closable air outlets
- Remote controller
- Built-in LED lamp
- Mounting frame as standard
- Weight of outdoor unit only 29,5 kg

space and air in harmony

... wherever you go

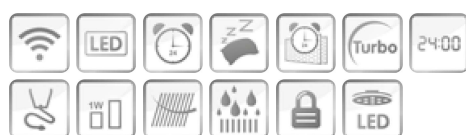

INDOOR PANEL
ULTRASLIM AND
INNOVATIVE DESIGN



TECHNICAL PARAMETERS

MODEL			ASV-25BIS	ASV-35BIS	
Capacity cooling / heating	kW		2,6 / 2,5	3,6 / 3,4	
Power supply	Hz / V		1~ / 50 / 220-240	1~ / 50 / 220-240	
EER/ COP			2,8 / 3,2	3,3 / 3,6	
Sound pressure level at 1m	ID	dB(A)	53 / 49 / 42	54 / 49 / 43	
	OD	dB(A)	54	54	
Dimension (w x h x d)/Net weight	ID	mm/kg	610×49×485 / 2,7	610×49×485 / 2,7	
	OD	mm/kg	1077×283×720 / 29,5	1077×283×720 / 29,5	
Operating temperature range (Cool/Heat)	°C		18 ~ 46 / -5 ~ 24	18 ~ 46 / -5 ~ 24	