


multi variable series

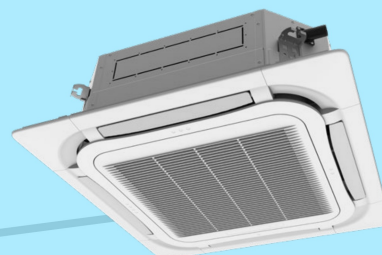

outdoor units

FEATURES

- Energy class A++/A+
- Autorestart function
- Lightweight, compact design
- High efficiency - SEER up to 7,8

STANDARD ACCESSORIES

- Chassis heater
- Pipe adapters
- Drain plugs
- Drain water adapter

space and air
in harmony
... tailored to your space



TECHNICAL PARAMETERS

MODEL		MV-E14BI2	MV-E18BI2	MV-E21BI2
Number of connectable indoor units		1-2	1-2	2-3
Capacity cooling / heating	kW	4,1 / 4,4	5,3 / 5,6	6,1 / 6,5
Power supply	Phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
SEER / SCOP	-	7,2 / 4,2	6,6 / 4,0	7,8 / 4,3
Energy class cooling/ heating (Average)	-	A++ / A+	A++ / A+	A++ / A+
Sound pressure level at 1m	dB(A)	52	54	58
Dimension (w x h x d)/Net weight	mm/kg	822×550×352 / 30,0	822×550×352 / 32,0	964×660×402 / 47,5
Operating temperature range (Cool/Heat)	°C	-15~43 / -22~24	-15~43 / -22~24	-15~43 / -22~24

MODEL		MV-E24BI2	MV-E28BI2	MV-E36BI2
Number of connectable indoor units		2-3	2-4	2-4
Capacity cooling / heating	kW	7,1 / 8,6	8,0 / 9,5	10,6 / 12,0
Power supply	Phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
SEER / SCOP	-	7,1 / 4,3	7,2 / 4,2	7,2 / 4,0
Energy class cooling/ heating (Average)	-	A++ / A+	A++ / A+	A++ / A+
Sound pressure level at 1m	dB(A)	58	58	60
Dimension (w x h x d)/Net weight	mm/kg	964×660×402 / 47,5	964×660×402 / 51,0	1020×826×427 / 72,0
Operating temperature range (Cool/Heat)	°C	-15~43 / -22~24	-15~43 / -22~24	-15~43 / -22~24

MODEL		MV-E42BI2		
Number of connectable indoor units		2-5		
Capacity cooling / heating	kW	12,1 / 13,0		
Power supply	Phase / Hz / V	1~ / 50 / 220-240		
SEER / SCOP	-	NA		
Energy class cooling/ heating (Average)	-	NA		
Sound pressure level at 1m	dB(A)	60		
Dimension (w x h x d)/Net weight	mm/kg	1020×826×427 / 73,0		
Operating temperature range (Cool/Heat)	°C	-15~43 / -22~24		