


# uni split 2 series

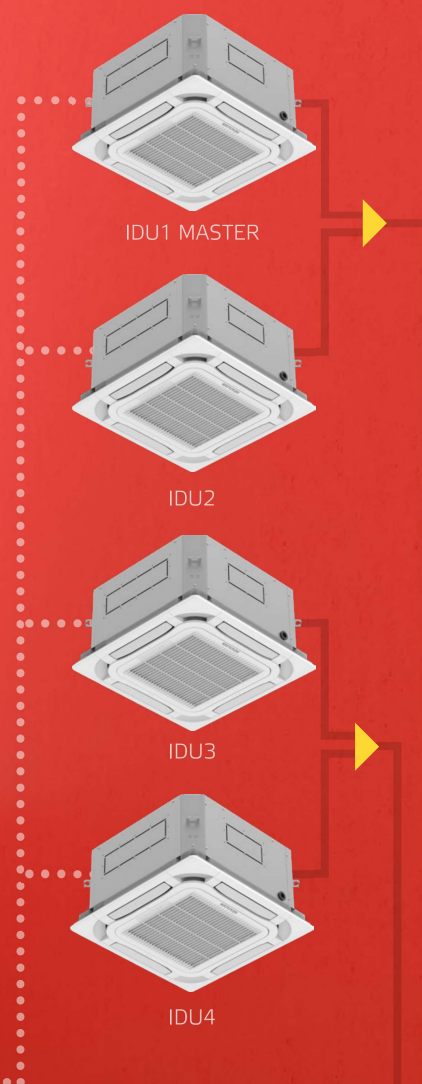

## outdoor units

### FEATURES

- Energy class A++ / A+
- Lightweight, compact design
- All capacities are single fan
- Chassis heater

### CONNECTION OPTIONS

- SPLIT APPLICATION:  
Represents a classic UNI split installation with one indoor unit.
- COMBI APPLICATION:  
Allows the connection of two, three or four indoor units of the same capacity and pipe lengths, controlled by one group controller. Refnets are not included and are sold separately.

SEMI-INDUSTRIAL UNITS  
AVAILABLE IN CAPACITIES  
OF 3,5 ~ 16 KW.  
UNITS WITH CAPACITIES  
OF 10 KW OR HIGHER ARE  
ALSO AVAILABLE IN 3-PHASE  
DESIGN.



### TECHNICAL PARAMETERS

MODEL		ASGE-12BI2	ASGE-18BI2	ASGE-24BI2
Capacity cooling / heating	kW	3,5 / 4,0	5,3 / 5,8	7,1 / 8,0
Power supply	Phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1m	dB(A)	48	52	55
Dimension (w x h x d)/Net weight	mm/kg	675×553×285 / 24,5	745×555×300 / 30,5	889×660×340 / 41,5
Operating temperature range (Cool/Heat)	°C	-20~-52 / -20~-24	-20~-52 / -20~-24	-20~-52 / -20~-24

MODEL		ASGE-30BI2	ASGE-36BI2	ASGE-36BI2-3
Capacity cooling / heating	kW	8,5 / 8,8	10,5 / 11,5	10,5 / 11,5
Power supply	Phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	3~ / 50 / 380-415
Sound pressure level at 1m	dB(A)	57	57	57
Dimension (w x h x d)/Net weight	mm/kg	889×660×340 / 46,0	940×820×530 / 65,0	940×820×370 / 75,0
Operating temperature range (Cool/Heat)	°C	-20~-52 / -20~-24	-20~-52 / -20~-24	-20~-52 / -20~-24

MODEL		ASGE-42BI2-3	ASGE-48BI2-3	ASGE-60BI2-3
Capacity cooling / heating	kW	12,1 / 13,5	13,4 / 15,5	16,0 / 17,0
Power supply	Phase / Hz / V	3~ / 50 / 380-415	3~ / 50 / 380-415	3~ / 50 / 380-415
Sound pressure level at 1m	dB(A)	58	59	60
Dimension (w x h x d)/Net weight	mm/kg	940×820×370 / 76,0	940×820×370 / 81,0	990×960×370 / 94,0
Operating temperature range (Cool/Heat)	°C	-20~-52 / -20~-24	-20~-52 / -20~-24	-20~-52 / -20~-24