


INDOOR UNITS

DUCT MEDIUM STATIC PRESSURE

FEATURES

- External static pressure up to 160 Pa
- Condensate pump included
- 7 speeds of fan
- Possibility of flexible connection of air ducts
- The units are equipped with a fresh air inlet
- Equipped with alarm and ON/OFF contact with selectable logic
- Optionally wired / group controller
SWC-61, SWC-62, SWC-63

SDV6-DMXX

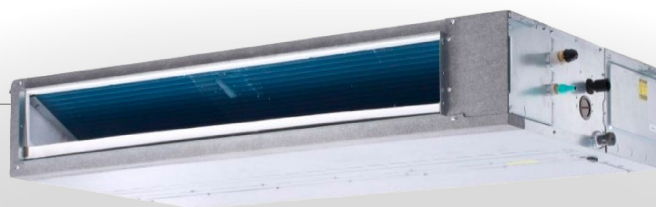

TECHNICAL PARAMETERS

MODEL		SDV6-DM15	SDV6-DM22	SDV6-DM28	SDV6-DM36
Capacity cooling / heating	kW	1,5 / 1,8	2,2 / 2,4	2,8 / 3,2	3,6 / 4,0
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1 m	dB(A)	27 / 26 / 25 / 24 / 23 / 23 / 22	27 / 26 / 25 / 24 / 23 / 23 / 22	27 / 26 / 25 / 24 / 23 / 23 / 22	29 / 28 / 27 / 26 / 25 / 23 / 22
External static pressure	nom. / min - max	30 / 10 - 160	30 / 10 - 160	30 / 10 - 160	30 / 10 - 160
Dimension (w × h × d) / Net weight	mm / kg	710 × 245 × 770 / 18,5	710 × 245 × 770 / 18,5	710 × 245 × 770 / 18,5	710 × 245 × 770 / 18,5

MODEL		SDV6-DM45	SDV6-DM56	SDV6-DM71	SDV6-DM80
Capacity cooling / heating	kW	4,5 / 5,0	5,6 / 6,3	7,1 / 8,0	8,0 / 9,0
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1 m	dB(A)	33 / 32 / 30 / 28 / 27 / 25 / 24	33 / 32 / 31 / 30 / 28 / 26 / 25	35 / 34 / 32 / 31 / 29 / 28 / 26	37 / 36 / 34 / 33 / 31 / 30 / 28
External static pressure	nom. / min - max	30 / 10 - 160	30 / 10 - 160	30 / 10 - 160	40 / 10-160
Dimension (w × h × d) / Net weight	mm / kg	710 × 245 × 770 / 19,5	910 × 245 × 770 / 24,0	910 × 245 × 770 / 25,0	1160 × 245 × 770 / 30,0

MODEL		SDV6-DM90	SDV6-DM112	SDV6-DM125	SDV6-DM140
Capacity cooling / heating	kW	9,0 / 10,0	11,2 / 12,5	12,5/14,0	14,0/16,0
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1 m	dB(A)	37 / 36 / 34 / 33 / 31 / 30 / 28	39 / 37 / 35 / 33 / 31 / 29 / 28	40 / 38 / 36 / 34 / 32 / 30 / 29	40 / 38 / 36 / 34 / 32 / 30 / 29
External static pressure	nom. / min - max	40 / 10-160	40 / 10-160	40 / 10-160	50 / 10-160
Dimension (w × h × d) / Net weight	mm / kg	1160 × 245 × 770 / 31,0	1510 × 245 × 770 / 37,0	1510 × 245 × 770 / 39,0	1510 × 245 × 770 / 39,0

MODEL		SDV6-DM160			
Capacity cooling / heating	kW	16,0/18,0			
Power supply	phase / Hz / V	1~ / 50 / 220-240			
Sound pressure level at 1 m	dB(A)	42 / 40 / 38 / 36 / 34 / 33 / 31			
External static pressure	nom. / min - max	50 / 10-160			
Dimension (w × h × d) / Net weight	mm / kg	1510 × 245 × 770 / 39,0			