

INDOOR UNITS HIGH PRESSURE STATIC DUCT SERIES


FEATURES

- External static pressure up to 400 Pa
- Condensate pump included
- 7 speeds of fan
- Possibility of flexible connection of air ducts
- Equipped with alarm and ON/OFF contact with selectable logic
- Possibility of flexible connection of air ducts
- Optionally wired / group controller SWC-61, SWC-62, SWC-63

SDV6-DH56
SDV6-DH71
SDV6-DH80
SDV6-DH90



SDV6-DH112
SDV6-DH125
SDV6-DH140
SDV6-DH160

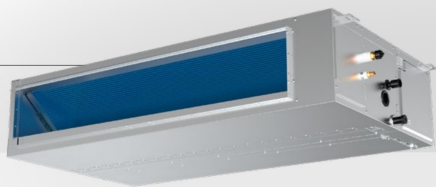

NEW



SDV6-DH200
SDV6-DH224
SDV6-DH280
SDV6-DH335



SDV6-DH400
SDV6-DH450
SDV6-DH560

TECHNICAL PARAMETERS

MODEL		SDV6-DH56	SDV6-DH71	SDV6-DH80	SDV6-DH90
Capacity cooling / heating	kW	5,6 / 6,3	7,1 / 8,0	8,0 / 9,0	9,0 / 10,0
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1 m	dB(A)	39 / 38 / 36 / 35 / 33 / 32 / 30	39 / 38 / 36 / 35 / 33 / 32 / 30	39 / 38 / 36 / 35 / 33 / 32 / 30	40 / 39 / 37 / 36 / 34 / 33 / 31
External static pressure	nom. / min - max	80 (0-250)	80 (0-250)	80 (0-250)	80 (0-250)
Dimension (w × h × d) / Net weight	mm / kg	1135 × 299 × 770 / 35,0	1135 × 299 × 770 / 35,0	1135 × 299 × 770 / 35,0	1135 × 299 × 770 / 35,0

MODEL		SDV6-DH112	SDV6-DH125	SDV6-DH140	SDV6-DH160
Capacity cooling / heating	kW	11,2 / 12,5	12,5 / 14,0	14,0 / 16,0	16,0 / 18,0
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1 m	dB(A)	41 / 40 / 38 / 37 / 35 / 34 / 32	41 / 40 / 39 / 37 / 36 / 35 / 33	43 / 42 / 40 / 39 / 37 / 36 / 34	44 / 43 / 41 / 40 / 38 / 37 / 35
External static pressure	nom. / min - max	80 (0-250)	100 (0-250)	100 (0-250)	100 (0-250)
Dimension (w × h × d) / Net weight	mm / kg	1485 × 299 × 770 / 44,5	1485 × 299 × 770 / 46,5	1485 × 299 × 770 / 46,5	1485 × 299 × 770 / 46,5

MODEL		SDV6-DH200	SDV6-DH224	SDV6-DH280	SDV6-DH335
Capacity cooling / heating	kW	20,0 / 24,4	22,4 / 25,0	28,0 / 31,5	33,5 / 38,0
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Sound pressure level at 1 m	dB(A)	51 / 50 / 48 / 46 / 44 / 43 / 42	51 / 50 / 48 / 46 / 44 / 43 / 42	51 / 50 / 48 / 46 / 44 / 43 / 42	52 / 51 / 49 / 48 / 46 / 44 / 43
External static pressure	nom. / min - max	200 / 0 - 400	200 / 0 - 400	200 / 0 - 400	200 / 0 - 400
Dimension (w × h × d) / Net weight	mm / kg	1300 × 580 × 900 / 125,0	1300 × 580 × 900 / 125,0	1300 × 580 × 900 / 125,0	1300 × 580 × 900 / 128,0

MODEL		SDV6-DH400	SDV6-DH450	SDV6-DH560	
Capacity cooling / heating	kW	40,0 / 45,0	45,0 / 56,0	56,0 / 63,0	
Power supply	phase / Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	
Sound pressure level at 1 m	dB(A)	58 / 56 / 54 / 52 / 50 / 49 / 48	58 / 56 / 54 / 52 / 50 / 49 / 48	59 / 58 / 56 / 54 / 53 / 51 / 49	
External static pressure	nom. / min - max	300 / 0 - 400	300 / 0 - 400	300 / 0 - 400	
Dimension (w × h × d) / Net weight	mm / kg	1800 × 580 × 1060 / 166,0	1800 × 580 × 1060 / 166,0	1800 × 580 × 1060 / 170,0	