


MMD-UP_SPHY
SLIM DUCT

> NEW

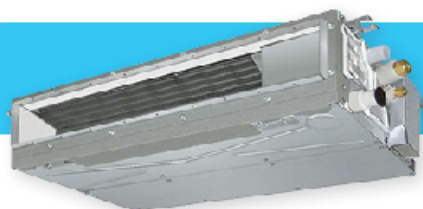

Whatever installed in a ceiling void or suspended ceiling, Toshiba slim duct offers the best compromise between sound level, air flow and chassis dimensions.

Flexibility

- Compact chassis with 210mm height and 450mm depth whatever the capacity, for integration in most projects.
- Capacity from 0.3HP for high efficiency buildings.
- Static pressure up to 50Pa set directly on the duct or by using a wired remote controller.

Comfort

- Quiet operation with a noise level down to 25 dB(A) perfect for bedrooms.
- 5-speed fan operation for perfect air flow adaptation.

Easy installation

- Built-in drain pump.
- Air suction from rear or bottom.

CAPACITY



0.9kW > 8kW

SOUND PRESSURE LEVEL



25dB(A)

OUTDOOR UNITSSide Blow
& Mini SMMS-e

SMMS-u

SMMS-e
& SHRM-e**LOCAL CONTROLS**

RBC-AXU31-E

RBC-AMSU51E-ES/EN
RBC-AMTU31-E
RBC-ASCU11-E**SLIM DUCT Performances**

Indoor unit		MMD-	UP0031SPHY-E	UP0051SPHY-E	UP0071SPHY-E	UP0091SPHY-E	UP0121SPHY-E	UP0151SPHY-E	UP0181SPHY-E	UP0241SPHY-E	UP0271SPHY-E
Cooling capacity		kW	0.9	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.0
Heating capacity		kW	1	1.9	2.5	3.2	4.0	5.0	6.3	8.0	9.0
Factory setting	Power consumption	kW	0.018 / 0.018	0.020 / 0.020	0.026 / 0.026	0.029 / 0.029	0.031 / 0.031	0.035 / 0.035	0.044 / 0.044	0.067 / 0.067	0.072 / 0.072
	Running current	A	0.34 / 0.36	0.36 / 0.37	0.40 / 0.42	0.42 / 0.44	0.44 / 0.46	0.47 / 0.49	0.53 / 0.56	0.69 / 0.73	0.74 / 0.78
	Starting current	A	0.60 / 0.63	0.62 / 0.65	0.69 / 0.73	0.73 / 0.77	0.77 / 0.81	0.82 / 0.86	0.92 / 0.97	1.21 / 1.27	1.30 / 1.36
Standard ESP UP003-018:30Pa, UP024-027:40Pa	Power consumption	kW	0.024 / 0.024	0.026 / 0.026	0.035 / 0.035	0.038 / 0.038	0.043 / 0.043	0.046 / 0.046	0.054 / 0.054	0.086 / 0.086	0.092 / 0.092
	Running current	A	0.37 / 0.39	0.40 / 0.41	0.46 / 0.48	0.48 / 0.50	0.52 / 0.54	0.54 / 0.57	0.60 / 0.63	0.83 / 0.87	0.88 / 0.93
	Starting current	A	0.65 / 0.69	0.69 / 0.73	0.81 / 0.85	0.84 / 0.88	0.90 / 0.95	0.95 / 0.99	1.04 / 1.10	1.45 / 1.53	1.54 / 1.62

SLIM DUCT Physical data

Indoor unit	MMD-	UP0031SPHY-E	UP0051SPHY-E	UP0071SPHY-E	UP0091SPHY-E	UP0121SPHY-E	UP0151SPHY-E	UP0181SPHY-E	UP0241SPHY-E	UP0271SPHY-E
Air flow (H/M+/M/L+/L)	m³/h	410/390/370/ 360/350	450/430/410/ 390/380	540/500/460/ 430/400	570/530/500/ 450/420	600/550/520/ 470/440	690/660/640/ 590/560	780/760/730/ 690/660	1080/1010/950/ 900/860	1140/1060/980/ 940/910
Air flow (H/M+/M/L+/L)	l/s	114/108/103/ 100/97	125/119/114/ 108/106	150/139/128/ 119/111	158/147/139/ 125/117	167/153/144/ 131/122	192/183/178/ 164/153	217/211/203/ 192/181	300/281/264/ 250/239	317/294/272/ 261/253
Sound pressure level*, rear suction (H/M+/M/L+/L)	dB(A)	29/28/27/26/25	30/29/28/27/26	31/30/29/28/26	32/31/29/28/26	33/32/30/29/27	33/31/30/29/28	34/33/32/31/29	36/35/33/32/30	37/36/34/33/32
Sound pressure level*, bottom suction (H/M+/M/L+/L)	dB(A)	37/36/35/34/32	39/38/37/35/34	41/40/39/38/35	42/41/40/38/36	44/42/40/39/37	42/40/39/38/37	44/43/42/41/39	47/46/44/43/41	48/47/45/44/43
Sound power level* (H/M+/M/L+/L)		46/45/44/43/42	49/47/46/45/44	52/51/49/47/45	54/52/50/48/46	54/51/50/48/46	52/51/50/49/46	56/55/54/52/51	60/58/56/55/53	61/59/58/56/55
Dimensions (HxWxD)	mm	210x700x450				210x900x450			210x1110x450	
Weight	kg	16				18			21	
External static pressure	Pa	10	10	10	10	10	10	10	10	10
Max external static pressure	Pa	50	50	50	50	50	50	50	50	50
Connecting pipe, gas		3/8"	3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	5/8"	5/8"
Connecting pipe, liquid		1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	3/8"	3/8"
Drain port diameter	mm	25	25	25	25	25	25	25	25	25
Power supply	V-ph-Hz	220/240-1-50								

* Factory setting (10Pa)