

4-Way Standard Cassette

- Combined with DI CLASSIC outdoor unit
- 360° air distribution or direct air flow
- Efficiency up to A++
- Integrated drain pump (850 mm); prepared for external fresh air supply
- Accessories required: remote control + panel



Digital Inverter CLASSIC – 1-phase – 4-way standard cassette

INDOOR UNIT OUTDOOR UNIT			RAV-HM561UTP-E RAV-GV561ATP-E	RAV-HM801UTP-E RAV-GV801ATP-E	RAV-HM1101UTP-E RAV-GV1101ATP-E	RAV-HM1401UTP-E RAV-GV1401ATP-E	RAV-HM1601UTP-E RAV-GV1601ATP-E*
Cooling capacity	kW	❄	5,00	6,70	9,50	11,50	13,00
Cooling range (min.-max.)	kW	❄	1,50 - 5,60	1,50 - 8,00	3,00 - 11,20	3,00 - 12,00	3,00 - 14,00
Power consumption (min./nom./max.)	kW	❄	- /1,60/ -	0,26/2,22/ 2,60	- /3,15/ -	- /4,60/ -	- /5,40/ -
Energy efficiency EER	W/W	❄	3,13	3,02	3,02	2,50	2,41
Energy efficiency SEER		❄	6,20	5,81	6,00	5,10	5,90
Energy efficiency class		❄	A++	A+	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	❄	-15 / +46	-15 / +46	-15 / +46	-15 / +46	-15 / +46
Heating capacity	kW	🔥	5,30	7,70	10,00	11,90	13,50
Heating range (min.-max.)	kW	🔥	1,50 - 6,30	1,50 - 9,00	3,00 - 13,00	3,00 - 16,00	3,00 - 18,00
Power consumption (min./nom./max.)	kW	🔥	- /1,40/ -	0,26/2,13/ 3,03	- /3,10/ -	- /3,80/ -	- /3,90/ -
Energy efficiency COP	W/W	🔥	3,79	3,62	3,23	3,13	3,46
Energy efficiency SCOP		🔥	4,20	4,42	4,00	3,90	4,20
Energy efficiency class		🔥	A+	A+	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	🔥	-15 / +15	-15 / +15	-15 / +15	-15 / +15	-15 / +15
Power supply	V/Ph+N/Hz		220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50
Recommended fusing	A		16	16	20	25	25
Set price incl. RBC-AMTU31-E + RBC-U32PGP-E	€		3.000,-	3.570,-	4.360,-	4.850,-	5.850,-

INDOOR UNIT			RAV-HM561UTP-E	RAV-HM801UTP-E	RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1601UTP-E
Airflow	m³/h		780/870/ 1050	810/960/ 1230	1170/1440/ 2010	1230/1440/ 2100	1260/1500/ 2130
Sound pressure level (low/med/high)	dB(A)	❄	28/29/32	28/31/35	33/38/43	34/38/44	36/40/45
Sound pressure level (low/med/high)	dB(A)	🔥	28/29/32	28/31/35	33/38/43	34/38/44	36/40/45
Dimensions (HxWxD)	mm		256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Weight	kg		20	20	24	24	24
Panel dimensions (HxWxD)	mm		30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950
Panel weight	kg		4,2	4,2	4,2	4,2	4,2
Price	€		1.100,-	1.260,-	1.550,-	1.730,-	1.950,-

OUTDOOR UNIT			RAV-GV561ATP-E	RAV-GV801ATP-E	RAV-GV1101ATP-E	RAV-GV1401ATP-E	RAV-GV1601ATP-E*
Sound pressure level (low/med/high)	dB(A)	❄	46	48	53	53	57
Sound pressure level (low/med/high)	dB(A)	🔥	48	51	55	60	59
Suction gas pipe diameter	mm (inch)		12,7 (½)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)
Liquid pipe diameter	mm (inch)		6,4 (¼)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Pipe length (min.)	m		5	5	5	5	5
Pipe length (max.)	m		30	30	30	30	30
Height difference (max.)	m		20	20	30	30	30
Compressor type			Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary
Refrigerant			R32	R32	R32	R32	R32
Refrigerant charge	kg		0,90	1,40	1,70	1,90	2,20
Dimensions (HxWxD)	mm		550 x 780 x 290	550 x 780 x 290	630 x 800 x 300	710 x 900 x 320	890 x 900 x 320
Weight	kg		36	39	45	57	64
Price	€		1.390,-	1.800,-	2.300,-	2.610,-	3.390,-

* Changing to RAV-GV1601ATP-E1 during the year.

You will find all the control options from page 104 onwards.

Digital Inverter CLASSIC – 3-phase – 4-way standard cassette

INDOOR UNIT OUTDOOR UNIT			RAV-HM1101UTP-E RAV-GV1101AT8P-E	RAV-HM1401UTP-E RAV-GV1401AT8P-E	RAV-HM1601UTP-E RAV-GV1601AT8P-E*
Cooling capacity	kW	❄	9,50	12,10	14,00
Cooling range (min.-max.)	kW	❄	3,00 - 11,20	3,00 - 14,00	3,00 - 16,00
Power consumption (min./nom./max.)	kW	❄	- /3,10/ -	- /4,80/ -	0,65/4,49/5,70
Energy efficiency EER	W/W	❄	3,06	2,52	3,12
Energy efficiency SEER		❄	6,20	5,10	6,30
Energy efficiency class		❄	A++	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	❄	-15 / +46	-15 / +46	-15 / +46
Heating capacity	kW	☀	10,00	12,30	16,00
Heating range (min.-max.)	kW	☀	3,00 - 13,00	3,00 - 16,00	3,00 - 18,00
Power consumption (min./nom./max.)	kW	☀	- /3,00/ -	- /4,10/ -	0,65/4,43/5,66
Energy efficiency COP	W/W	☀	3,33	3,00	3,61
Energy efficiency SCOP		☀	4,10	3,90	4,35
Energy efficiency class		☀	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	☀	-15 / +15	-15 / +15	-15 / +15
Power supply	V/Ph+N/Hz		380-415/3+N/50	380-415/3+N/50	380-415/3+N/50
Recommended fusing	A		3x 16	3x 16	3x 16
Set price incl. RBC-AMTU31-E + RBC-U32PGP-E	€		4.720,-	5.110,-	6.410,-

INDOOR UNIT			RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1601UTP-E
Airflow	m³/h		1170/1440/2010	1230/1440/2100	1260/1500/2130
Sound pressure level (low/med/high)	dB(A)	❄	33/38/43	34/38/44	36/40/45
Sound pressure level (low/med/high)	dB(A)	☀	33/38/43	34/38/44	36/40/45
Dimensions (HxWxD)	mm		319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Weight	kg		24	24	24
Panel dimensions (HxWxD)	mm		30 x 950 x 950	30 x 950 x 950	30 x 950 x 950
Panel weight	kg		4,2	4,2	4,2
Price	€		1.550,-	1.730,-	1.950,-

OUTDOOR UNIT			RAV-GV1101AT8P-E	RAV-GV1401AT8P-E	RAV-GV1601AT8P-E*
Sound pressure level (low/med/high)	dB(A)	❄	53	53	57
Sound pressure level (low/med/high)	dB(A)	☀	55	60	59
Suction gas pipe diameter	mm (inch)		15,9 (5/8)	15,9 (5/8)	15,9 (5/8)
Liquid pipe diameter	mm (inch)		9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Pipe length (min.)	m		5	5	5
Pipe length (max.)	m		30	30	30
Height difference (max.)	m		30	30	30
Compressor type			Twin-Rotary	Twin-Rotary	Twin-Rotary
Refrigerant			R32	R32	R32
Refrigerant charge	kg		1,70	1,90	2,20
Dimensions (HxWxD)	mm		710 x 900 x 320	710 x 900 x 320	890 x 900 x 320
Weight	kg		60	60	63
Price	€		2.660,-	2.870,-	3.950,-


* Changing to RAV-GV1601AT8P-E1 during the year.

You will find all the control options from page 104 onwards.

The accessories for the 4-way standard cassette can be found on page 89.

4-way standard cassette

- › Combined with DI outdoor unit
- › 360° air distribution or direct air flow
- › Efficiency up to A++
- › Integrated drain pump (850 mm); prepared for external fresh air supply
- › Accessories required: remote control + panel

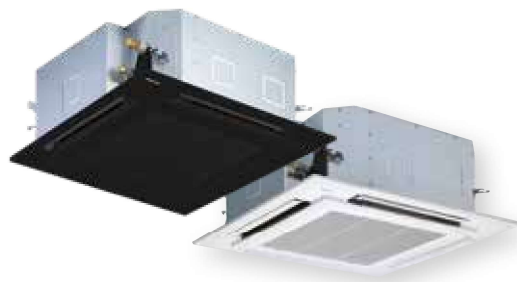

Digital Inverter – 1-phase – 4-way standard cassette

INDOOR UNIT OUTDOOR UNIT			RAV-HM561UTP-E RAV-GM562ATP-E	RAV-HM801UTP-E RAV-GM802ATW-E	RAV-HM901UTP-E RAV-GM902ATW-E	RAV-HM1101UTP-E RAV-GM1102ATW-E	RAV-HM1401UTP-E RAV-GM1402ATW-E	RAV-HM1601UTP-E RAV-GM1602ATW-E
Cooling capacity	kW	❄️	5,00	6,70	8,00	9,50	12,10	14,00
Cooling range (min.-max.)	kW	❄️	1,50 - 5,60	1,90 - 8,00	1,80 - 8,80	3,00 - 11,20	3,00 - 13,20	3,00 - 15,00
Power consumption (min./nom./max.)	kW	❄️	0,26/1,56/ 1,86	0,29/1,90/ 2,59	0,29/2,29/ 2,88	0,52/2,57/ 3,11	0,52/3,88/ 4,23	0,52/5,05/ 6,00
Energy efficiency EER	W/W	❄️	3,21	3,52	3,50	3,70	3,12	2,77
Energy efficiency SEER		❄️	6,84	7,50	7,50	7,50	7,30	6,60
Energy efficiency class		❄️	A++	A++	A++	A++	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	❄️	-15 / +46	-15 / +46	-15 / +46	-15 / +46	-15 / +46	-15 / +46
Heating capacity	kW	🔥	5,30	7,70	8,60	11,20	13,00	16,00
Heating range (min.-max.)	kW	🔥	1,50 - 6,30	1,60 - 9,00	160 - 9,90	3,00 - 13,00	3,00 - 16,00	3,00 - 18,00
Power consumption (min./nom./max.)	kW	🔥	0,26/1,36/ 2,08	0,27/1,99/ 2,66	0,27/2,09/ 2,68	0,67/2,86/ 3,39	0,67/3,43/ 4,55	0,67/4,72/ 5,47
Energy efficiency COP	W/W	🔥	3,90	3,87	4,12	3,92	3,79	3,39
Energy efficiency SCOP		🔥	4,62	4,60	4,60	4,40	4,40	4,40
Energy efficiency class		🔥	A++	A++	A++	A++	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	🔥	-15 / +15	-15 / +15	-15 / +15	-15 / +15	-15 / +15	-15 / +15
Power supply	V/Ph+N/Hz		220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50
Recommended fusing	A		16	16	16	25	25	32
Set price incl. RBC-AMTU31-E + RBC-U32PGP-E	€		3.460,-	4.220,-	4.580,-	5.360,-	5.800,-	6.710,-

INDOOR UNIT			RAV-HM561UTP-E	RAV-HM801UTP-E	RAV-HM901UTP-E	RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1601UTP-E
Airflow	m³/h		780/870/ 1050	810/960/ 1230	900/- / 1600	1170/1440/ 2010	1230/1440/ 2100	1260/1500/ 2130
Sound pressure level (low/med/high)	dB(A)	❄️	28/29/32	28/31/35	33/36/40	33/38/43	34/38/44	36/40/45
Sound pressure level (low/med/high)	dB(A)	🔥	28/29/32	28/31/35	33/36/40	33/38/43	34/38/44	36/40/45
Dimensions (HxWxD)	mm		256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Weight	kg		20	20	24	24	24	24
Panel dimensions (HxWxD)	mm		30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950
Panel weight	kg		4,2	4,2	4,2	4,2	4,2	4,2
Price	€		1.100,-	1.260,-	1.390,-	1.550,-	1.730,-	1.950,-

OUTDOOR UNIT			RAV-GM562ATP-E	RAV-GM802ATW-E	RAV-GM902ATW-E	RAV-GM1102ATW-E	RAV-GM1402ATW-E	RAV-GM1602ATW-E
Sound pressure level (low/med/high)	dB(A)	❄️	46	50	52	53	56	57
Sound pressure level (low/med/high)	dB(A)	🔥	48	52	55	56	56	56
Suction gas pipe diameter	mm (inch)		12,7 (1/2)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)
Liquid pipe diameter	mm (inch)		6,4 (1/4)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Pipe length (min.)	m		5	5	5	5	5	5
Pipe length (max.)	m		30	50	50	50	50	50
Height difference (max.)	m		30	30	30	30	30	30
Compressor type			Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary
Refrigerant			R32	R32	R32	R32	R32	R32
Refrigerant charge	kg		0,90	1,90	1,90	2,40	2,40	2,40
Dimensions (HxWxD)	mm		550 x 780 x 290	630 x 799 x 299	630 x 799 x 299	1050 x 1010 x 370	1050 x 1010 x 370	1050 x 1010 x 370
Weight	kg		40	47	47	85	85	88
Price	€		1.850,-	2.450,-	2.680,-	3.300,-	3.560,-	4.250,-

You will find all the control options from page 104 onwards.

Digital Inverter – 3-phase – 4-way standard cassette

INDOOR UNIT OUTDOOR UNIT			RAV-HM1101UTP-E RAV-GM1102AT8W-E	RAV-HM1401UTP-E RAV-GM1402AT8W-E	RAV-HM1601UTP-E RAV-GM1602AT8W-E
Cooling capacity	kW	❄	9,50	12,10	14,00
Cooling range (min.-max.)	kW	❄	3,00 - 11,20	3,00 - 13,20	3,00 - 15,00
Power consumption (min./nom./max.)	kW	❄	0,56/2,52/3,07	0,56/3,81/4,19	0,56/4,92/5,90
Energy efficiency EER	W/W	❄	3,76	3,17	2,84
Energy efficiency SEER		❄	7,15	6,91	6,53
Energy efficiency class		❄	A++	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	❄	-15 / +46	-15 / +46	-15 / +46
Heating capacity	kW	☀	11,20	13,00	16,00
Heating range (min.-max.)	kW	☀	3,00 - 13,00	3,00 - 16,00	3,00 - 18,00
Power consumption (min./nom./max.)	kW	☀	0,71/2,82/3,35	0,71/3,39/4,51	0,71/4,65/6,71
Energy efficiency COP	W/W	☀	3,97	3,83	3,44
Energy efficiency SCOP		☀	4,29	4,30	4,38
Energy efficiency class		☀	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C	☀	-15 / +15	-15 / +15	-15 / +15
Power supply	V/Ph+N/Hz		380-415/3+N/50	380-415/3+N/50	380-415/3+N/50
Recommended fusing	A		3x 16	3x 16	3x 16
Set price incl. RBC-AMTU31-E + RBC-U32PGP-E	€		5.840,-	6.340,-	7.240,-

INDOOR UNIT			RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1601UTP-E
Airflow	m³/h		1170/1440/2010	1230/1440/2100	1260/1500/2130
Sound pressure level (low/med/high)	dB(A)	❄	33/38/43	34/38/44	36/40/45
Sound pressure level (low/med/high)	dB(A)	☀	33/38/43	34/38/44	36/40/45
Dimensions (HxWxD)	mm		319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Weight	kg		24	24	24
Panel dimensions (HxWxD)	mm		30 x 950 x 950	30 x 950 x 950	30 x 950 x 950
Panel weight	kg		4,2	4,2	4,2
Price	€		1.550,-	1.730,-	1.950,-

OUTDOOR UNIT			RAV-GM1102AT8W-E	RAV-GM1402AT8W-E	RAV-GM1602AT8W-E
Sound pressure level (low/med/high)	dB(A)	❄	53	56	57
Sound pressure level (low/med/high)	dB(A)	☀	56	56	56
Suction gas pipe diameter	mm (inch)		15,9 (5/8)	15,9 (5/8)	15,9 (5/8)
Liquid pipe diameter	mm (inch)		9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Pipe length (min.)	m		5	5	5
Pipe length (max.)	m		50	50	50
Height difference (max.)	m		30	30	30
Compressor type			Twin-Rotary	Twin-Rotary	Twin-Rotary
Refrigerant			R32	R35	R32
Refrigerant charge	kg		2,40	2,40	2,40
Dimensions (HxWxD)	mm		1050 x 1010 x 370	1050 x 1010 x 370	1050 x 1010 x 370
Weight	kg		85	85	88
Price	€		3.780,-	4.100,-	4.780,-

You will find all the control options from page 104 onwards.

The accessories for the 4-way standard cassette can be found on page 89.

4-way standard cassette

- › Combined with SDI outdoor unit
- › 360° air distribution or direct air flow
- › Efficiency up to A++
- › Integrated drain pump (850 mm); prepared for external fresh air supply
- › Accessories required: remote control + panel



Super Digital Inverter – 4-way standard cassette

		1-phase				3-phase		
INDOOR UNIT		RAV-HM561UTP-E RAV-GP561ATW-E	RAV-HM801UTP-E RAV-GP801ATW-E	RAV-HM1101UTP-E RAV-GP1101AT-E	RAV-HM1401UTP-E RAV-GP1401AT-E1	RAV-HM1101UTP-E RAV-GP1101AT8-E	RAV-HM1401UTP-E RAV-GP1401AT8-E*	RAV-HM1601UTP-E RAV-GP1601AT8-E
Cooling capacity	kW ❄️	5,00	7,10	10,00	12,50	10,00	12,50	14,00
Cooling range (min.-max.)	kW ❄️	1,20 - 5,60	1,90 - 8,00	3,10 - 12,00	3,10 - 14,00	2,60 - 12,00	2,60 - 14,00	2,60 - 16,00
Power consumption (min./nom./max.)	kW ❄️	0,19/1,22/ 1,97	0,26/1,58/ 3,15	0,56/1,90/ 2,80	0,53/3,16/ 3,55	0,66/2,32/ 3,60	0,66/3,42/ 4,40	0,66/4,34/ 5,70
Energy efficiency EER	W/W ❄️	4,10	4,49	4,69	3,96	4,31	3,65	3,23
Energy efficiency SEER	❄️	7,73	8,96	9,00	8,59	7,32	7,35	6,99
Energy efficiency class	❄️	A++	A+++	A+++	n/a	A++	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C ❄️	-15 / +52	-15 / +52	-15 / +52	-15 / +52	-15 / +46	-15 / +46	-15 / +46
Heating capacity	kW 🔥	5,60	8,00	11,20	14,00	11,20	14,00	16,00
Heating range (min.-max.)	kW 🔥	0,90 - 8,10	1,30 - 11,30	2,60 - 13,00	2,60 - 16,50	2,40 - 15,60	2,40 - 18,00	2,40 - 19,00
Power consumption (min./nom./max.)	kW 🔥	0,16/1,30/ 2,76	0,20/1,77/ 3,47	0,41/2,18/ 2,98	0,40/3,21/ 4,38	0,53/2,41/ 4,30	0,53/3,41/ 5,50	0,53/4,28/ 6,51
Energy efficiency COP	W/W 🔥	4,31	4,52	4,79	4,36	4,65	4,11	3,74
Energy efficiency SCOP	🔥	4,98	5,24	4,76	4,75	4,38	4,38	4,38
Energy efficiency class	🔥	A++	A+++	A++	n/a	A+	n/a	n/a
Outdoor temperature operating range (min.-max.)	°C 🔥	-27 / +15	-27 / +15	-27 / +15	-27 / +15	-20 / +15	-20 / +15	-20 / +15
Power supply	V/Ph+N/Hz	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	380-415/3+N/ 50	380-415/3+N/ 50	380-415/3+N/ 50
Recommended fusing	A	16	20	25	25	3x 16	3x 16	3x 16
Set price incl. RBC-AMTU31-E + RBC-U32PGP-E	€	3.810,-	4.610,-	6.360,-	6.990,-	6.270,-	6.640,-	7.440,-

INDOOR UNIT		RAV-HM561UTP-E	RAV-HM801UTP-E	RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1101UTP-E	RAV-HM1401UTP-E	RAV-HM1601UTP-E
Airflow	m³/h	780/870/ 1050	810/960/ 1230	1170/1440/ 2010	1230/1440/ 2100	1170/1440/ 2010	1230/1440/ 2100	1260/1500/ 2130
Sound pressure level (low/med/high)	dB(A) ❄️	28/29/32	28/31/35	33/38/43	34/38/44	33/38/43	34/38/44	36/40/45
Sound pressure level (low/med/high)	dB(A) 🔥	28/29/32	28/31/35	33/38/43	34/38/44	33/38/43	34/38/44	36/40/45
Dimensions (HxWxD)	mm	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
Weight	kg	20	20	24	24	24	24	24
Panel dimensions (HxWxD)	mm	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950	30 x 950 x 950
Panel weight	kg	4,2	4,2	4,2	4,2	4,2	4,2	4,2
Price	€	1.100,-	1.260,-	1.550,-	1.730,-	1.550,-	1.730,-	1.950,-

OUTDOOR UNIT		RAV-GP561ATW-E	RAV-GP801ATW-E	RAV-GP1101AT-E	RAV-GP1401AT-E1	RAV-GP1101AT8-E	RAV-GP1401AT8-E*	RAV-GP1601AT8-E
Sound pressure level (low/med/high)	dB(A) ❄️	46	46	49	50	49	51	51
Sound pressure level (low/med/high)	dB(A) 🔥	48	48	50	51	50	52	53
Suction gas pipe diameter	mm (inch)	12,7 (½)	15,9 (5/8)	15,9 (¾)	15,9 (¾)	15,9 (¾)	15,9 (5/8)	15,9 (5/8)
Liquid pipe diameter	mm (inch)	6,4 (¼)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Pipe length (min.)	m	5	5	5	5	5	5	5
Pipe length (max.)	m	50	50	75	75	75	75	75
Height difference (max.)	m	30	30	30	30	30	30	30
Compressor type		Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary	Twin-Rotary
Refrigerant		R32	R32	R32	R32	R32	R32	R32
Refrigerant charge	kg	1,35	1,30	3,10	3,10	2,60	2,60	2,60
Dimensions (HxWxD)	mm	630 x 799 x 299	1050 x 1010 x 370	1550 x 1010 x 370	1550 x 1010 x 370	1340 x 900 x 320	1340 x 900 x 320	1340 x 900 x 320
Weight	kg	45	74	104	104	95	95	95
Price	€	2.200,-	2.840,-	4.300,-	4.750,-	4.210,-	4.400,-	4.980,-

* Changing to RAV-GP1401AT8-E1 during the year.
You will find all the control options from page 104 onwards.

4-way standard cassette / accessories

4-way standard cassette

ACCESSORIES	DESCRIPTION	PRICE €
RBC-U32PGP-E	Panel for wide airflow	360,-
RBC-U33P-E	FLAT Panel - pure white, for 4-way standard cassette	360,-
RBC-AMTU31-E	Standard Wired Remote Control	150,-
RBC-AXU31U-E	Infrared remote control + receiver kit for installation in 4-way standard cassette	325,-
RBC-AXU33UP-E	Infrared remote control + receiver kit for installation in FLAT Panel 4-way standard cassette, pure white	215,-
TCB-FF101URE2	Spigot flange for fresh air connection Ø 100 mm	80,-
TCB-PLFC1UPE	PM 2.5 Filterset (before dustfilter), compatible to RBC-U32PGP-E, RBC-U33PB-E	20,-
TCB-SIR33UP-E	Occupancy sensor kit for installation in FLAT Panel	125,-
TCB-EAPC1UHP-E	PURE Plasmafilter kit for installation in FLAT Panel 4-way standard cassette	1.490,-
TCB-ADCN510UP-E	Panel adapter for RBC-U33P-E + RBC-U33PB-E	60,-
TCB-EABC1UHP-E	PURE plasma filter kit SIMPLIFIED for installation in FLAT panel 4-way standard cassette	800,-

BLACK

ACCESSORIES	DESCRIPTION	PRICE €
RBC-U33PB-E	FLAT panel - BLACK, for 4-way standard cassette	380,-
TCB-PLFC1UPE	PM 2.5 Filterset (before dustfilter), compatible to RBC-U32PGP-E, RBC-U33PB-E	20,-
RBC-AXU33UPB-E	Infrared remote control + receiver kit for installation in FLAT Panel 4-way standard cassette, BLACK	235,-

