

SSD super-slim duct unit

- › Minimal installation height of just 210 mm
- › Lightweight and quiet, with compact dimensions
- › Integrated air filter & drain pump (350 mm)






INDOOR UNIT			MMD-UP0031SPHY-E	MMD-UP0051SPHY-E	MMD-UP0071SPHY-E	MMD-UP0091SPHY-E	MMD-UP0121SPHY-E
Cooling capacity	kW	❄️	0,90	1,70	2,20	2,80	3,60
Heating capacity	kW	🔥	1,00	1,90	2,50	3,20	4,00
Airflow	m³/h		410/380/ 360	450/410/ 380	540/470/ 400	570/500/ 430	600/520/ 440
Sound pressure level (low/med/high)	dB(A)	❄️	25/26/ 27/28/ 29	26/27/ 28/29/ 30	26/28/ 29/30/ 31	26/28/ 29/31/ 32	27/29/ 30/32/ 33
Liquid pipe diameter	mm (inch)		6,4 (¼)	6,4 (¼)	6,4 (¼)	6,4 (¼)	6,4 (¼)
Suction gas pipe diameter	mm (inch)		9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Condensate pipe diameter	mm		VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)
Power supply	V/Ph+N/Hz		220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50	220-240/1+N/ 50
Power consumption (min./nom./max.)	kW	❄️	0,018	0,02	0,026	0,029	0,031
External static pressure	Pa		10/20/ 30/40/ 50	10/20/ 30/40/ 50	10/20/ 30/40/ 50	10/20/ 30/40/ 50	10/20/ 30/40/ 50
Dimensions (HxWxD)	mm		210 x 700 x 450	210 x 700 x 450	210 x 700 x 450	210 x 700 x 450	210 x 700 x 450
Weight	kg		16	16	16	16	16
Price	€		1.110,-	1.130,-	1.170,-	1.185,-	1.240,-

INDOOR UNIT			MMD-UP0151SPHY-E	MMD-UP0181SPHY-E	MMD-UP0241SPHY-E	MMD-UP0271SPHY-E
Cooling capacity	kW	❄️	4,50	5,60	7,10	8,00
Heating capacity	kW	🔥	5,00	6,30	8,00	9,00
Airflow	m³/h		690/640/550	780/750/660	1080/950/860	1140/980/910
Sound pressure level (low/med/high)	dB(A)	❄️	28/29/30/31/33	29/31/32/33/34	30/32/33/35/36	32/33/34/36/37
Liquid pipe diameter	mm (inch)		6,4 (¼)	6,4 (¼)	9,5 (3/8)	9,5 (3/8)
Suction gas pipe diameter	mm (inch)		12,7 (½)	12,7 (½)	15,9 (5/8)	15,9 (5/8)
Condensate pipe diameter	mm		VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)
Power supply	V/Ph+N/Hz		220-240/1+N/50	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50
Power consumption (min./nom./max.)	kW	❄️	0,035	0,044	0,067	0,072
External static pressure	Pa		10/20/30/40/50	10/20/30/40/50	10/20/30/40/50	10/20/30/40/50
Dimensions (HxWxD)	mm		210 x 900 x 450	210 x 900 x 450	210 x 1100 x 450	210 x 1100 x 450
Weight	kg		18	18	21	21
Price	€		1.300,-	1.380,-	1.480,-	1.590,-

ACCESSORIES	DESCRIPTION	PRICE €
TCB-FF101URE2	Spigot flange for fresh air connection Ø 100 mm	80,-
	TCB-TDL0141SDY-E Stylish lower unit for SSD Superflat Duct Unit. The three-dimensional air distribution ensures draft-free comfort. For sizes 5 to 12.	215,-
	TCB-TDL0181SDY-E Stylish lower unit for SSD Superflat Duct Unit. The three-dimensional air distribution ensures draft-free comfort. For sizes 15 and 18.	250,-
	TCB-TDL0271SDY-E Stylish lower unit for SSD Superflat Duct Unit. The three-dimensional air distribution ensures draft-free comfort. For sizes 24 and 27.	275,-

You will find all the control options from page 183 onwards.

SSD SUPER-SLIM DUCT UNIT

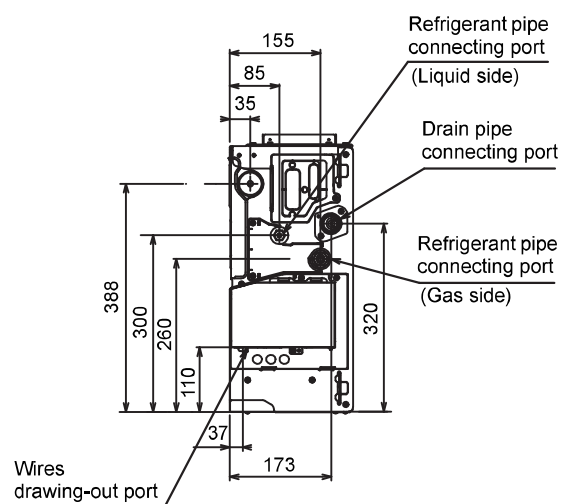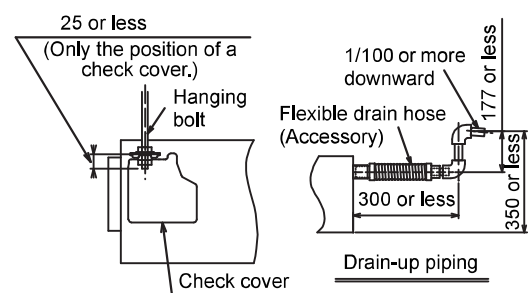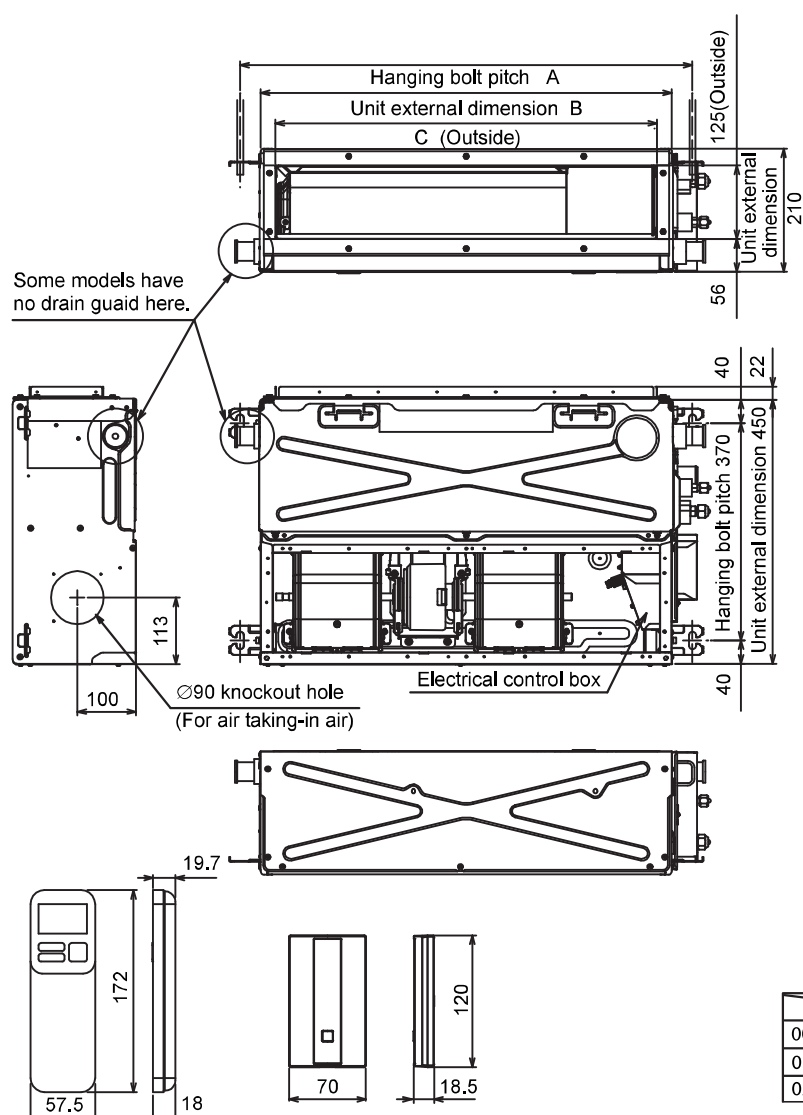

	A	B	C
003, 005, 007, 009, 012	770	700	650
015, 018	970	900	850
024, 027	1.170	1.100	1.050