

2-way cassette

- Draft-free air distribution, directed to 2 sides
- Integrated drain pump (850 mm); prepared for external fresh air supply
 - Accessories required: remote control + panel




INDOOR UNIT		MMU-UP0071WH-E	MMU-UP0091WH-E	MMU-UP0121WH-E	MMU-UP0151WH-E	MMU-UP0181WH-E
Cooling capacity	kW ❄️	2,20	2,80	3,60	4,50	5,60
Heating capacity	kW 🔥	2,50	3,20	4,00	5,00	6,30
Airflow	m³/h	450/498/558	450/498/558	450/498/558	450/534/600	618/750/900
Sound pressure level (low/med/high)	dB(A) ❄️	30/32/34	30/32/34	30/32/34	30/33/35	30/33/35
Liquid pipe diameter	mm (inch)	6,4 (¼)	6,4 (¼)	6,4 (¼)	6,4 (¼)	6,4 (¼)
Suction gas pipe diameter	mm (inch)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	12,7 (½)	12,7 (½)
Condensate pipe diameter	mm	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)
Power supply	V/Ph+N/Hz	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50
Power consumption (min./nom./max.)	kW ❄️	0,029	0,029	0,029	0,03	0,044
Dimensions (HxWxD)	mm	295 x 815 x 570	295 x 815 x 570	295 x 815 x 570	295 x 815 x 570	345 x 1180 x 570
Weight	kg	19	19	19	19	26
Panel dimensions (HxWxD)	mm	20 x 1050 x 680	20 x 1050 x 680	20 x 1050 x 680	20 x 1050 x 680	20 x 1415 x 680
Panel weight	kg	10	10	10	10	14
Price	€	1.870,-	1.960,-	2.000,-	2.065,-	2.115,-

INDOOR UNIT		MMU-UP0241WH-E	MMU-UP0271WH-E	MMU-UP0301WH-E	MMU-UP0361WH-E	MMU-UP0481WH-E	MMU-UP0561WH-E
Cooling capacity	kW ❄️	7,10	8,00	9,00	11,20	14,00	16,00
Heating capacity	kW 🔥	8,00	9,00	10,00	12,50	16,00	18,00
Airflow	m³/h	738/840/1050	738/840/1050	780/900/1260	1182/1434/1740	1230/1482/1800	1320/1578/2040
Sound pressure level (low/med/high)	dB(A) ❄️	33/35/38	33/35/38	34/37/40	36/39/42	37/40/43	39/42/46
Liquid pipe diameter	mm (inch)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)	9,5 (3/8)
Suction gas pipe diameter	mm (inch)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)	15,9 (5/8)
Condensate pipe diameter	mm	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)	VP25 (25/32)
Power supply	V/Ph+N/Hz	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50	220-240/1+N/50
Power consumption (min./nom./max.)	kW ❄️	0,054	0,054	0,064	0,073	0,088	0,117
Dimensions (HxWxD)	mm	345 x 1180 x 570	345 x 1180 x 570	345 x 1180 x 570	345 x 1600 x 570	345 x 1600 x 570	345 x 1600 x 570
Weight	kg	26	26	26	36	36	36
Panel dimensions (HxWxD)	mm	20 x 1415 x 680	20 x 1415 x 680	20 x 1415 x 680	20 x 1835 x 680	20 x 1835 x 680	20 x 1835 x 680
Panel weight	kg	14	14	14	14	14	14
Price	€	2.260,-	2.340,-	2.505,-	3.040,-	3.315,-	3.665,-


ACCESSORIES	DESCRIPTION	PRICE €
RBC-UW283PG(W)-E	Panel for sizes 7 to 15	560,-
RBC-UW803PG(W)-E	Panel for sizes 18 to 30	745,-
RBC-UW1403PG(W)-E	Panel for sizes 36 to 56	860,-
RBC-AXU31UW-E	Infrared remote control + receiver kit for installation in 2-way cassette	375,-
TCB-FF151US-E	Spigot flange for fresh air connection Ø 150 mm	80,-

You will find all the control options from page 183 onwards.




Auxiliary fresh air flange
TCB-FF151US-E


MMU-UP0071WH-E to MMU-UP0151WH-E

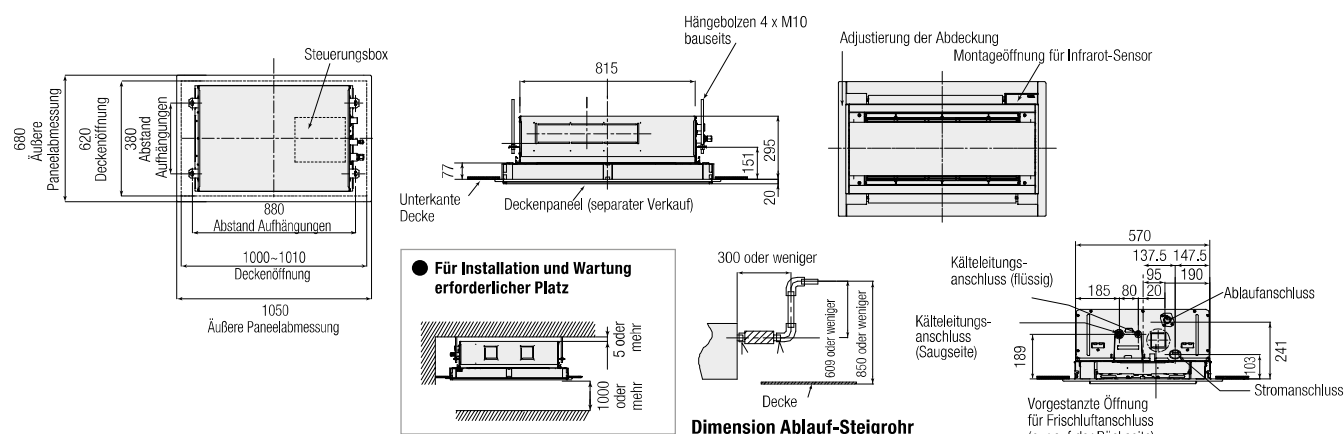

MMU-UP0181WH-E to MMU-UP0301WH-E

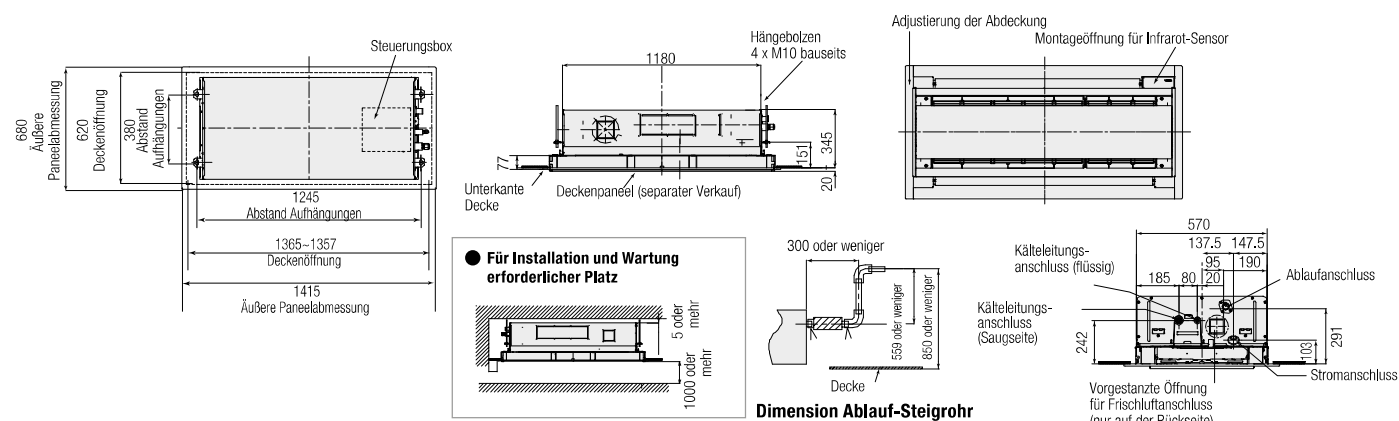

MMU-UP0361WH-E to MMU-UP0561WH-E

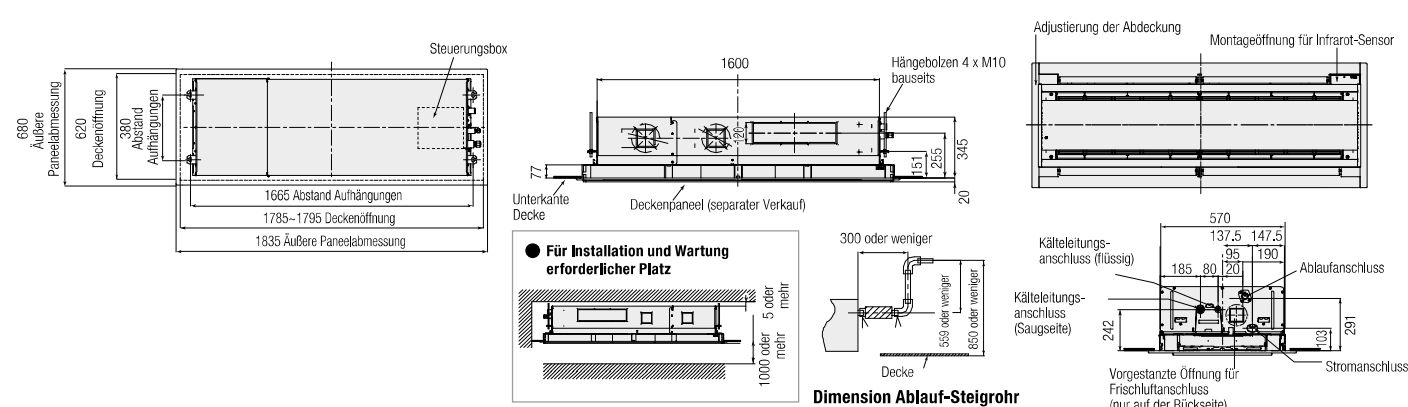

(Einheit: mm)