


(e) Satellite ducted type (FDUM)
Models All models

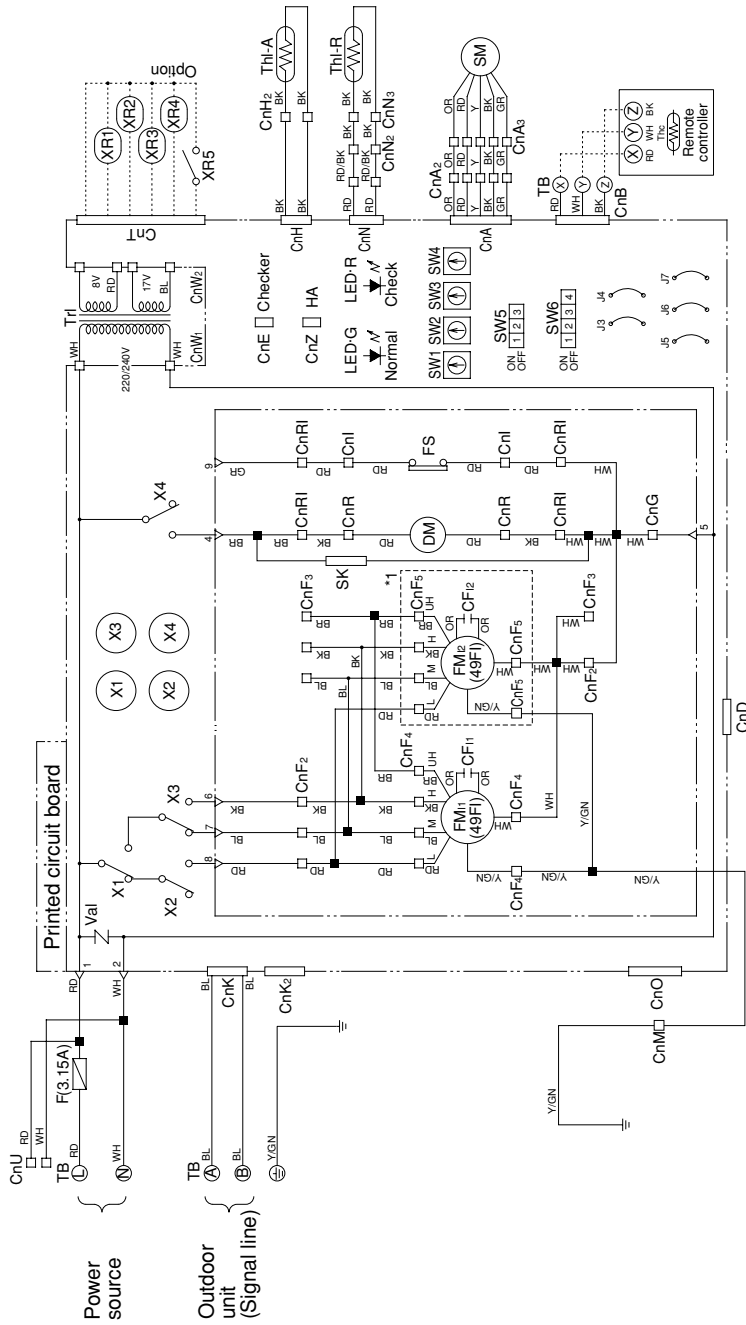

Color mark

Mark	Color	Mark	Color
BK	Black	RD	Red
BL	Blue	WH	White
BR	Brown	Y	Yellow
GR	Gray	Y/IGN	Yellow/Green
OR	Orange		

Function of switches

Mark	Function	
	Input signal	Reverse Invalid
SW5-1	ON	Reverse Invalid
	OFF	Run Stop
SW5-2	ON	Heating temp. shift + 3°C
	OFF	Normal
SW5-3	ON	Test run of condensate pump motor
	OFF	Normal

Note (1) * 1 FM_{1,2} is equipped with only for FDUMJ12HKXE2, 140HKXE2.

Meaning of marks

Mark	Parts name	Mark	Parts name
FM _{1,2}	Fan motor	CnA-Z	Connector (C mark)
CF _{1,2}	Capacitor for FM ₁	TB	Terminal block
DM	Drain motor	<mark	Terminal (F)
FS	Float switch (For overflow prevention)	mark	Connector
SM	Stepping motor (For Exp.v)	XR1	Operation indication (DC12)
X1.2.3	Auxiliary relay (For Exp.v)	XR2	Heating indication (DC12)
49F	Internal thermostat for FM ₁	XR3	ON indication for CM (DC12)
Th-A	Thermistor	XR4	Check indication (DC12)
		XR5	Distant operation
		SK	Spark killer
			Fuse