

PFFY-P-VCM-E

Floor Standing Concealed Indoor Unit

The **PFFY-P-VCM-E** is a compact concealed unit that provides simple, effective air conditioning in perimeter zones. The unit is easy to install and, at only 200mm deep, offers an unobtrusive method of delivering a highly efficient air conditioning performance.

Key Features & Benefits


- Concealed unit for hidden installation
- Ideal for perimeter installations and refurbishments
- 0-10-40-60Pa static pressure settings available for flexibility of design and application

R410A




INDOOR UNITS		PFFY-P20VCM-E	PFFY-P25VCM-E	PFFY-P32VCM-E	PFFY-P40VCM-E	PFFY-P50VCM-E	PFFY-P63VCM-E
CAPACITY (kW)	Heating (nominal)	2.5	3.2	4.0	5.0	6.3	8.0
	Cooling (nominal)	2.2	2.8	3.6	4.5	5.6	7.1
	UK Heating	2.5	3.2	4.0	5.0	6.3	8.0
	UK Total Cooling - Hi (Sensible)	2.00 (1.60)	2.50 (1.90)	3.20 (2.40)	4.10 (3.00)	5.00 (3.80)	6.40 (4.70)
	UK Total Cooling - Mi	1.92	2.40	3.05	3.95	4.81	6.11
POWER INPUT (kW)	UK Total Cooling - Lo	1.77	2.21	2.87	3.70	4.48	5.71
	Heating (nominal)	0.022	0.026	0.031	0.038	0.052	0.058
AIRFLOW (l/s)	Cooling (nominal)	0.022	0.026	0.031	0.038	0.052	0.058
	Lo-Mi-Hi	83-100-117	92-108-133	92-117-142	133-158-183	167-192-225	200-233-275
EXTERNAL STATIC PRESSURE (Pa)		0-10-40-60	0-10-40-60	0-10-40-60	0-10-40-60	0-10-40-60	0-10-40-60
SOUND PRESSURE LEVEL (dBA) Lo-Mi-Hi		21-23-26	22-25-29	23-26-30	25-27-30	28-31-34	28-32-35
WEIGHT (kg)		18	18	18.5	22.5	22.5	25.5
DIMENSIONS (mm)	Width	700	700	700	900	900	1100
	Depth	200	200	200	200	200	200
	Height	690	690	690	690	690	690
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.25 / 0.25	0.30 / 0.30	0.34 / 0.34	0.38 / 0.38	0.50 / 0.50	0.49 / 0.49
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6
MAINS CABLE No. Cores		3	3	3	3	3	3


Upper View

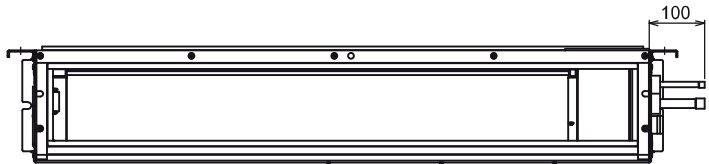


Lower View

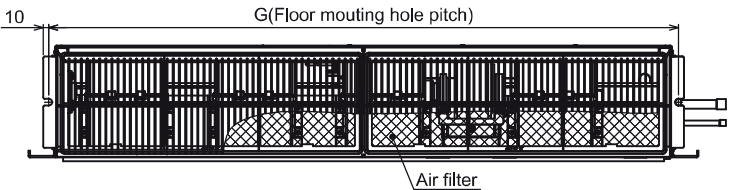

Front View

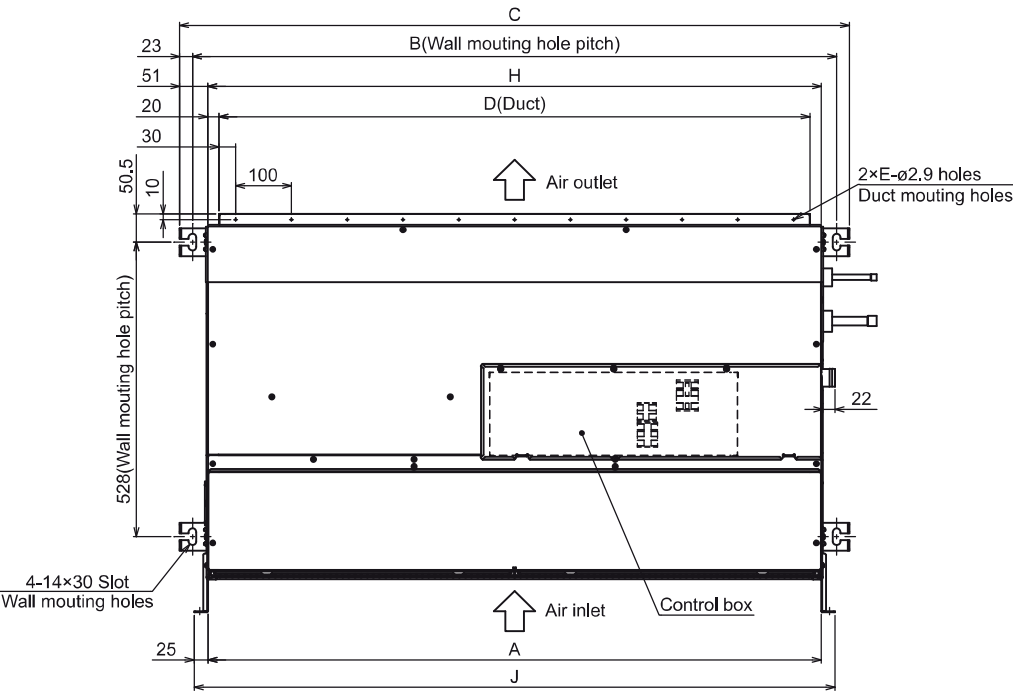

Side View

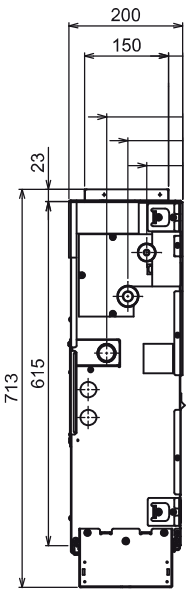

Model	A	B	C	D	E	F	G	H	J
PFFY-P20·25·32VCM-E	700	756	802	660	7	600	730	700	750
PFFY-P40·50VCM-E	900	956	1002	860	9	800	930	900	950
PFFY-P63VCM-E	1100	1156	1202	1060	11	1000	1130	1100	1150